150V 3.3mΩ TOLL N-Ch Power MOSFET

Features

- Ultra-low ON-resistance, $R_{DS(ON)}$
- Low Gate Charge, Q_g
- 100% UIS and R_g Tested
- Pb-free Lead Plating
- Halogen-free and RoHS-compliant
- AEC-Q101 Qualified for Automotive Applications

Product Summary

Parameter	Value	Unit
V_{DS}	150	V
$V_{GS(th)_Typ}$	3.2	V
I_D (@ V_{GS} = 10V) (2)	227	A
$R_{DS(ON)_Typ}$ (@ V_{GS} = 10V)	3.3	mΩ

PowerJE®10x12 Top



PowerJE®10x12 Bottom





Ordering Information

Device	Package	# of Pins	Marking	MSL	T_J (°C)	Media	Quantity (pcs)
JMSH1504ATLQ-13	PowerJE®10x12 (1)	8	SH1504AQ	1	-55 to 175	13-inch Reel	2000

Note 1: PowerJE® is a registered trademark of JieJie Micro., its package outline is compatible to that of TO-LeadLess (TOLL).

Absolute Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter		Symbol	Value	Unit
Drain-to-Source Voltage		V_{DS}	150	V
Gate-to-Source Voltage		V_{GS}	±20	V
Continuous Drain Current (2)	T_C = 25°C	I_D	227	A
	T_C = 100°C		160	
Pulsed Drain Current (3)		I_{DM}	907	A
Avalanche Current (4)		I_{AS}	40	A
Avalanche Energy (4)		E_{AS}	800	mJ
Power Dissipation (5)	T_C = 25°C	P_D	500	W
	T_C = 100°C		250	
Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 175	°C

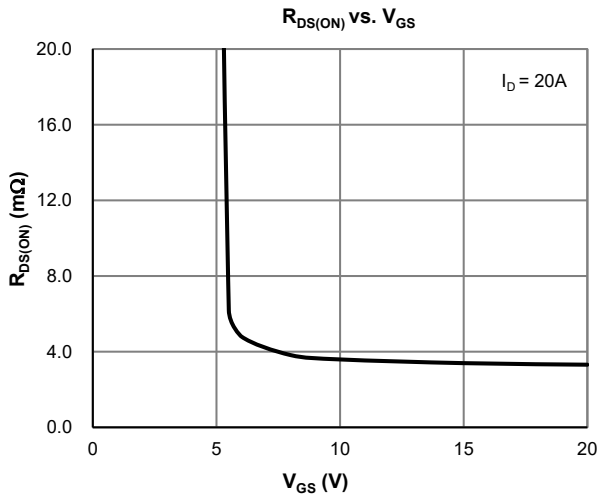

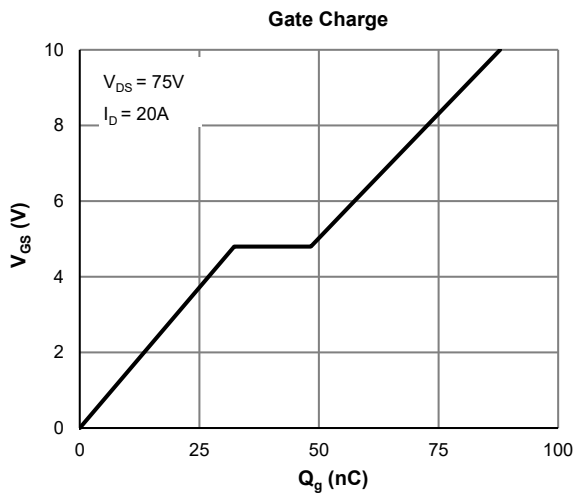

JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Electrical Characteristics (@ T_J = 25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
STATIC PARAMETERS						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	I_D = 250μA, V_{GS} = 0V	150			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 120V, V_{GS} = 0V			1.0	μA
		T_J = 55°C			5.0	
Gate-Body Leakage Current	I_{GSS}	V_{DS} = 0V, V_{GS} = ±20V			±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	2.5	3.2	4.5	V
Static Drain-Source ON-Resistance	$R_{DS(ON)}$	V_{GS} = 10V, I_D = 20A		3.3	4.2	mΩ
Forward Transconductance	g_{FS}	V_{DS} = 5V, I_D = 20A		97		S
Diode Forward Voltage	V_{SD}	I_S = 1A, V_{GS} = 0V		0.67	1.0	V
Diode Continuous Current	I_S	T_C = 25°C			500	A
DYNAMIC PARAMETERS [6]						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 75V, f = 1MHz		6540		pF
Output Capacitance	C_{oss}			772		pF
Reverse Transfer Capacitance	C_{rss}			6.7		pF
Gate Resistance	R_g	V_{GS} = 0V, V_{DS}= 0V, f = 1MHz		2.4		Ω
SWITCHING PARAMETERS [6]						
Total Gate Charge (@ V_{GS} = 10V)	Q_g	V_{GS} = 0 to 10V V_{DS} = 75V, I_D = 20A		88		nC
Total Gate Charge (@ V_{GS} = 6.0V)	Q_g			57		nC
Gate Source Charge	Q_{gs}			32.0		nC
Gate Drain Charge	Q_{gd}			16.0		nC
Turn-On DelayTime	$t_{D(on)}$	V_{GS} = 10V, V_{DS} = 75V R_L = 3.75Ω, R_{GEN} = 6Ω		48.0		ns
Turn-On Rise Time	t_r			90		ns
Turn-Off DelayTime	$t_{D(off)}$			94		ns
Turn-Off Fall Time	t_f			60		ns
Body Diode Reverse Recovery Time	t_{rr}	I_F = 20A, dI_F/dt = 100A/μs		122		ns
Body Diode Reverse Recovery Charge	Q_{rr}	I_F = 20A, dI_F/dt = 100A/μs		279		nC

Thermal Performance

Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	45	55	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.30	0.36	°C/W

Notes:

2. Computed continuous current assumes the condition of T_{J_Max} while the actual continuous current depends on the thermal & electro-mechanical application board design.
3. This single-pulse measurement was taken under T_{J_Max} = 175°C.
4. E_{AS} of 800 mJ is based on starting T_J = 25°C,L = 1.0mH, I_{AS} = 40A, V_{GS} = 10V, V_{DD} = 75V;100% test at L = 0.5mH, I_{AS} = 63A.
5. The power dissipation P_D is based on T_{J_Max} = 175°C.
6. This value is guaranteed by design hence it is not included in the production test.

JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Typical Electrical & Thermal Characteristics

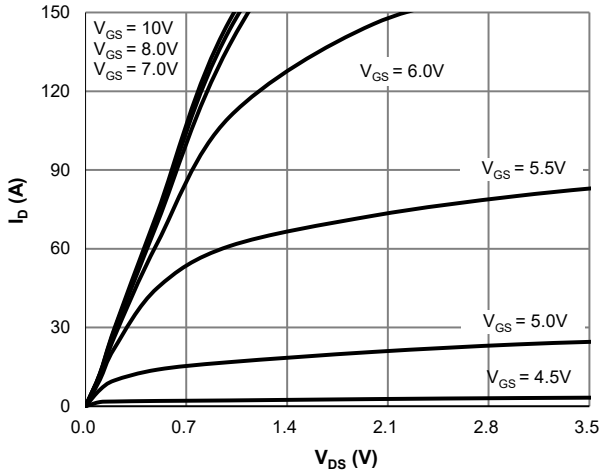

Figure 1: Saturation Characteristics

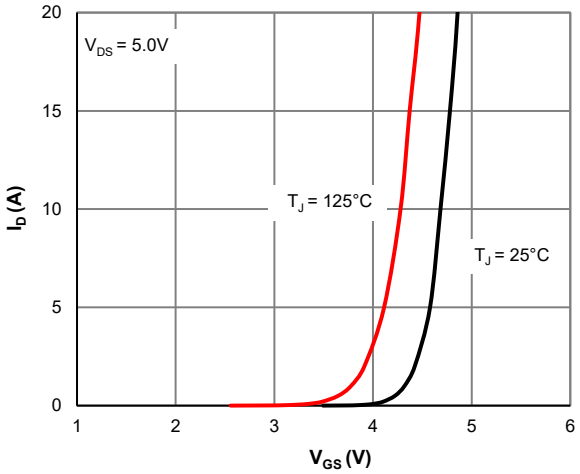

Figure 2: Transfer Characteristics

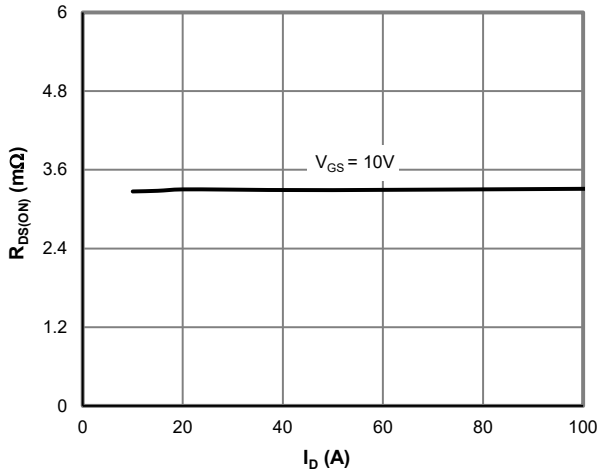

Figure 3: $R_{DS(ON)}$ vs. Drain Current

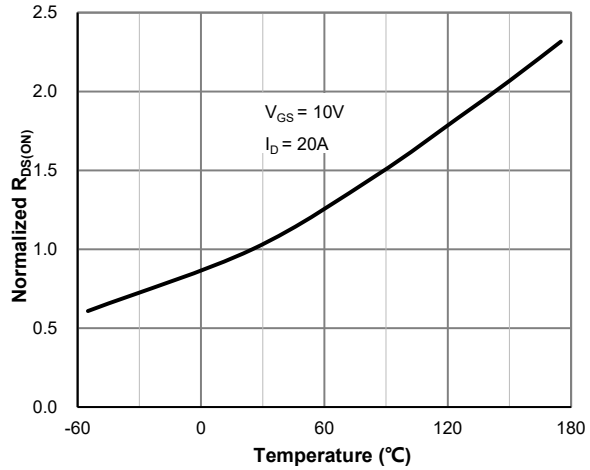

Figure 4: $R_{DS(ON)}$ vs. Junction Temperature

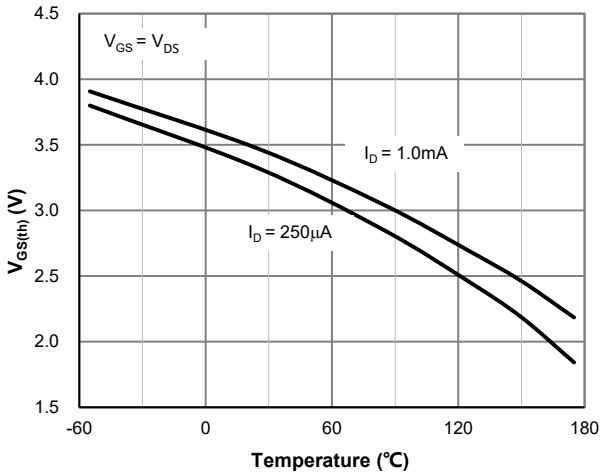

Figure 5: $V_{GS(th)}$ vs. Junction Temperature

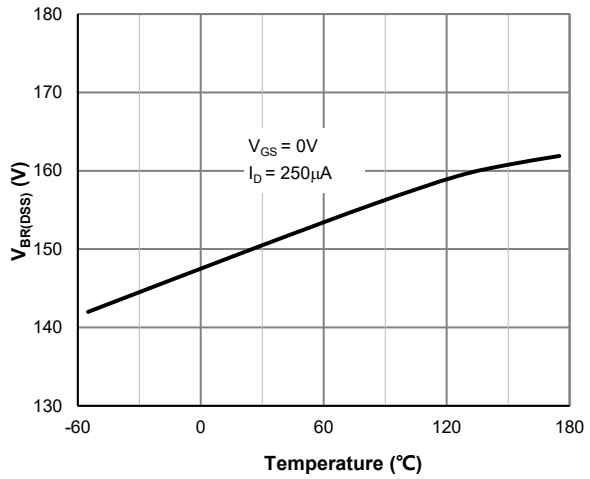

Figure 6: $V_{BR(DSS)}$ vs. Junction Temperature

JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

Typical Electrical & Thermal Characteristics

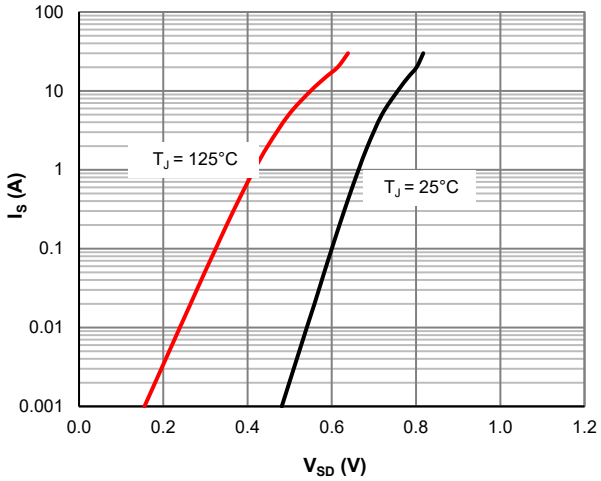

Figure 7: Body-Diode Characteristics

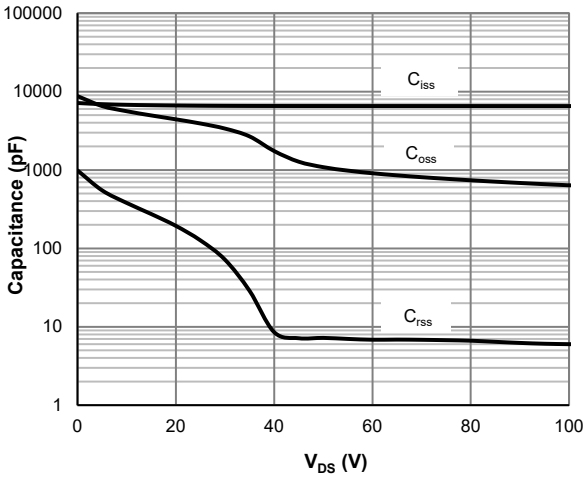

Figure 8: Capacitance Characteristics

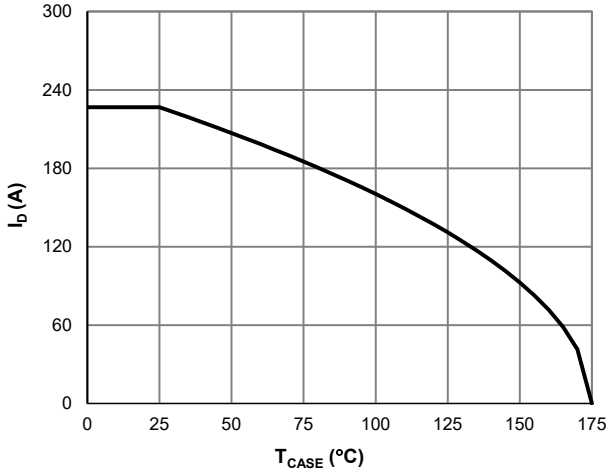

Figure 9: Current De-rating

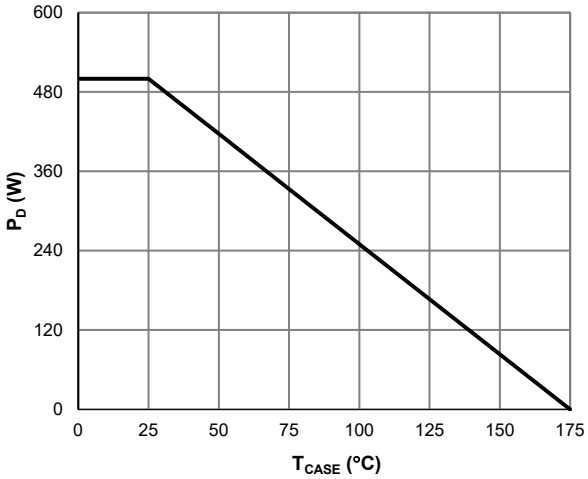

Figure 10: Power De-rating

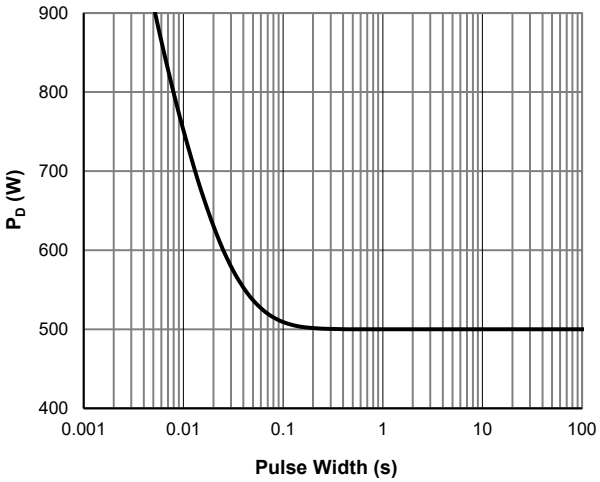

Figure 11: Single Pulse Power Rating, Junction-to-Case

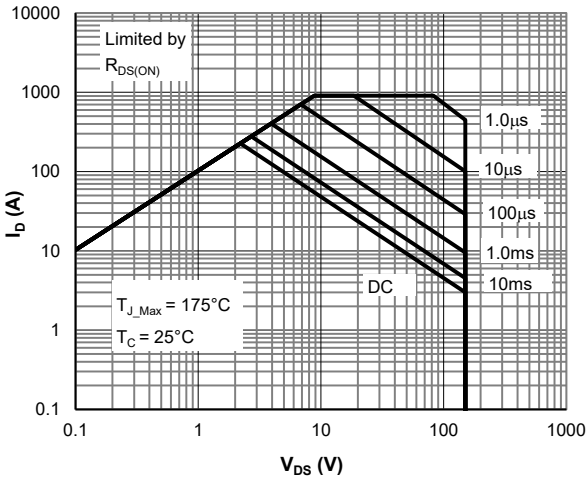

Figure 12: Maximum Safe Operating Area

All product information are copyrighted and subject to legal disclaimers

Typical Electrical & Thermal Characteristics

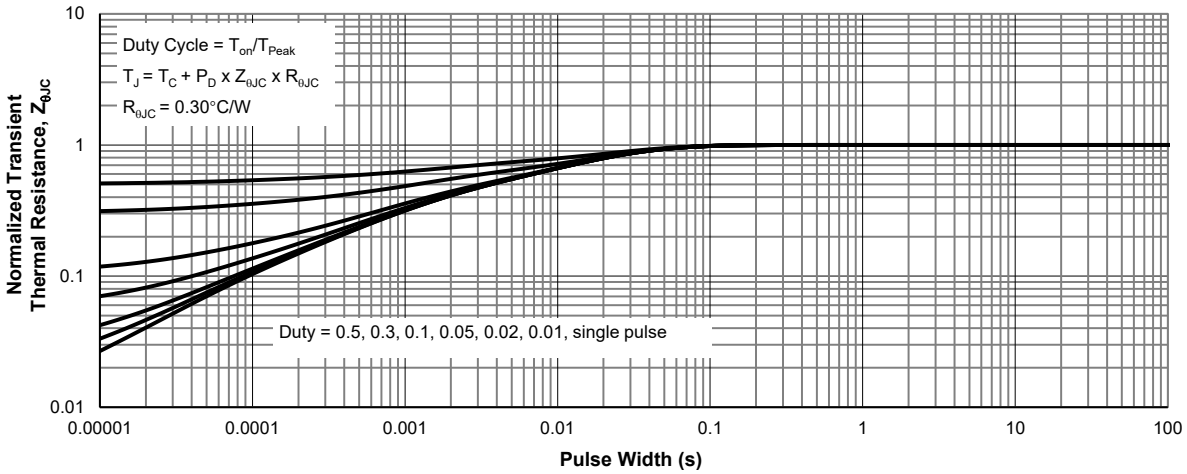

Figure 13: Normalized Maximum Transient Thermal Impedance

JieJie Microelectronics Co., Ltd.
All product information are copyrighted and subject to legal disclaimers

PowerJE®10x12 Package Information

Package Outlines



Top View



Side View

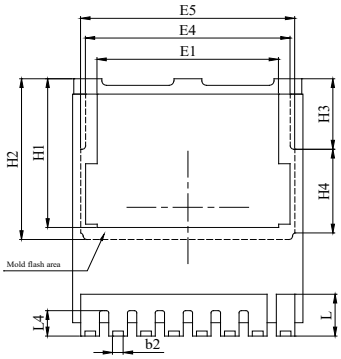

Bottom View



Front View

NOTES:
1. Dimension and tolerance per ASME Y14.5M, 1994.
2. All dimensions in millimeter.
3. Dimensions do not include burrs or mold flash. Mold flash or burrs does not exceed 0.150mm.

DIM.	MILLIMETER		
	MIN.	NOM.	MAX.
A	2.20	2.30	2.40
b	0.70	0.80	0.90
b1	9.70	9.80	9.90
b2	0.42	0.46	0.50
c	0.40	0.50	0.60
D	10.28	10.38	10.58
D2		3.30	
E	9.70	9.90	10.10
E1		7.80	
E4		8.80	
E5		9.20	
e		1.20 (BSC)	
H	11.48	11.68	11.88
H1	6.55	6.75	6.85
H2		7.30	
H3		3.20	
H4		3.80	
K1		4.18	
L	1.70	1.90	2.10
L1		0.70	
L2		0.60	
L4	1.00	1.15	1.30

Recommended Soldering Footprint

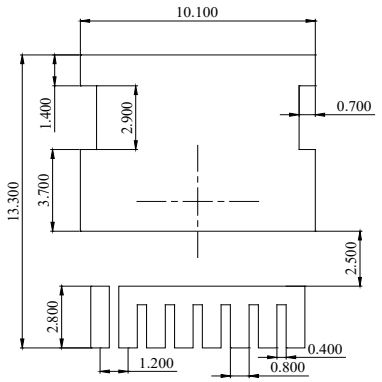

DIMENSIONS:MILLIMETERS

All product information are copyrighted and subject to legal disclaimers