Description

JMT P-channel Enhancement Mode Power MosFET

Features

- -20V, -2A
  $R_{DS(ON)}$ < 125mΩ @ V_{GS} = -4.5V
  $R_{DS(ON)}$ < 190mΩ @ V_{GS} = -2.5V
- Advanced Trench Technology
- Excellent $R_{DS(ON)}$ and Low Gate Charge
- Lead Free

Applications

- Load Switch
- PWM Application
- Power Management

RoHS



SOT-23 Top View



Marking and Pin Assignment



Schematic Diagram

Package Marking and Ordering Information

Device Marking	Device	Outline	Package	Reel Size	Reel(pcs)	Per Carton (pcs)
2301E	JMTL2301E	TAPING	SOT-23	7"	3000	120000

Absolute Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Symbol	Parameter		Value	Units
V_{DS}	Drain-to-Source Voltage		-20	V
V_{GS}	Gate-to-Source Voltage		±12	V
I_D	Continuous Drain Current	T_A = 25°C	-2	A
		T_A = 100°C	-1	
I_{DM}	Pulsed Drain Current (1)		-8	A
P_D	Power Dissipation	T_A = 25°C	1	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient(2)		120	°C/W
T_J, T_{STG}	Junction & Storage Temperature Range		-55 to 150	°C

Electrical Characteristics (T_J = 25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	I_D = -250μA, V_{GS} = 0V	-20	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = -20V, V_{GS} = 0V	-	-	-1.0	μA
I_{GSS}	Gate-Body Leakage Current	V_{DS} = 0V, V_{GS} = ±12V	-	-	±100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = -250μA	-0.4	-0.7	-1.0	V
$R_{DS(ON)}$	Static Drain-Source ON-Resistance(3)	V_{GS} = -4.5V, I_D = -2A	-	88	125	mΩ
		V_{GS} = -2.5V, I_D = -1A	-	116	190	mΩ
Dynamic Characteristics						
R_g	Gate Resistance	f = 1MHz	-	90	-	Ω
C_{iss}	Input Capacitance	V_{GS} = 0V, V_{DS} = -10V, f = 1MHz	167	234	328	pF
C_{oss}	Output Capacitance		24	34	48	pF
C_{rss}	Reverse Transfer Capacitance		17	24	34	pF
Q_g	Total Gate Charge	V_{GS} = 0 to -4.5V, V_{DS} = -10V, I_D = -2A	-	2.4	-	nC
Q_{gs}	Gate Source Charge		-	0.6	-	nC
Q_{gd}	Gate Drain("Miller") Charge		-	0.4	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-On DelayTime	V_{GS} = -4.5V, V_{DD} = -10V, I_D= -2A, R_{GEN} = 3Ω	-	5	-	ns
t_r	Turn-On Rise Time		-	18	-	ns
$t_{d(off)}$	Turn-Off DelayTime		-	79	-	ns
t_f	Turn-Off Fall Time		-	42	-	ns
Drain-Source Diode Characteristics and Max Ratings						
I_S	Maximum Continuous Drain to Source Diode Forward Current		-	-	-2	A
I_{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-8	A
V_{SD}	Drain to Source Diode Forward Voltage	V_{GS} = 0V, I_S = -2A	-	-	-1.2	V
trr	Body Diode Reverse Recovery Time	I_F = -2A, di/dt = 100A/us	-	4.4	-	ns
Qrr	Body Diode Reverse Recovery Charge		-	0.6	-	nC

Notes: 1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.

2. $R_{\theta JA}$ is measured with the device mounted on a $1inch^2$ pad of 2oz copper FR4 PCB

3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%.

Typical Performance Characteristics

Figure 1: Output Characteristics

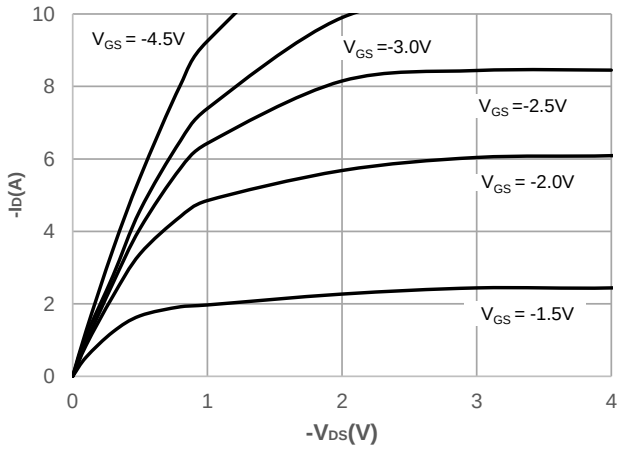

Figure 2: Typical Transfer Characteristics

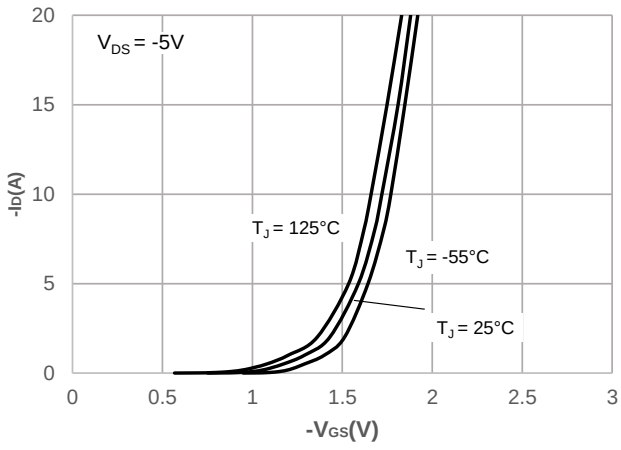

Figure 3: On-resistance vs. Drain Current

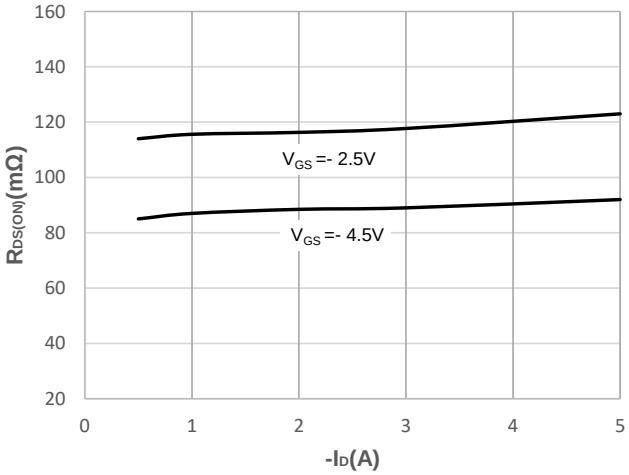

Figure 4: Body Diode Characteristics

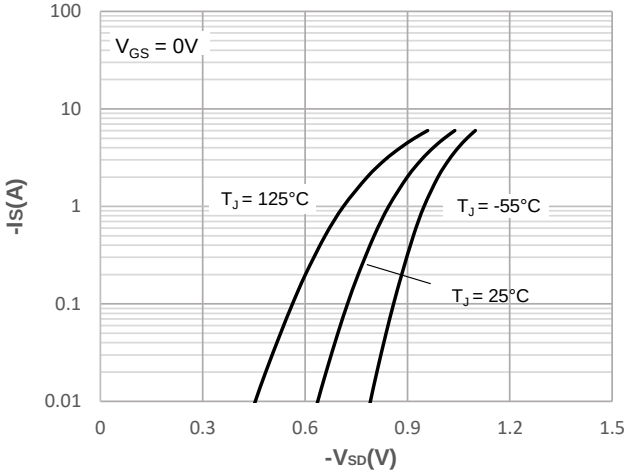

Figure 5: Gate Charge Characteristics

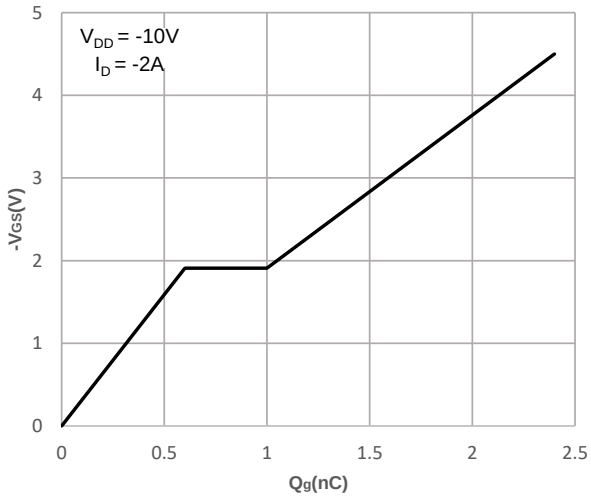

Figure 6: Capacitance Characteristics

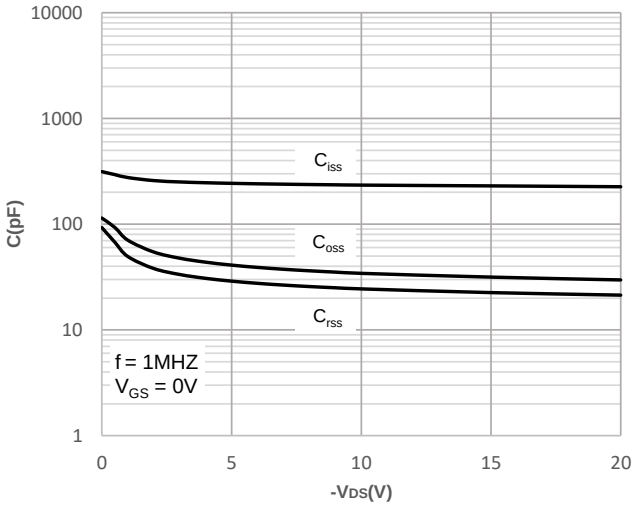

Typical Performance Characteristics

Figure 7: Normalized Breakdown voltage vs. Junction Temperature

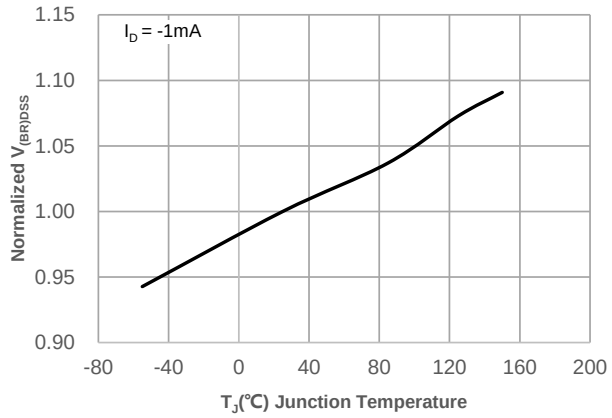

Figure 8: Normalized on Resistance vs. Junction Temperature

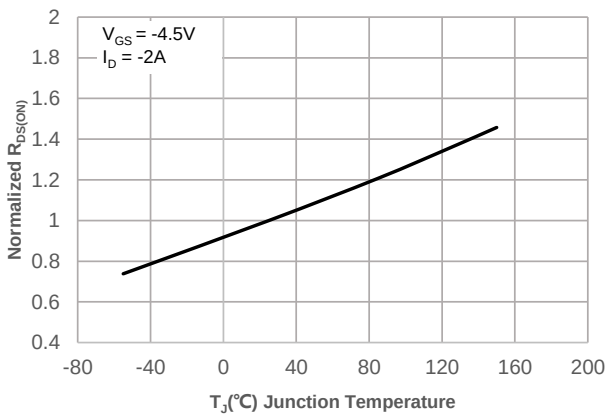

Figure 9: Maximum Safe Operating Area

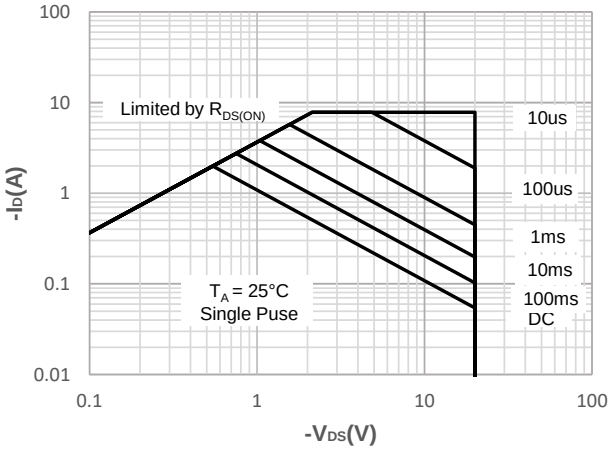

Figure 10: Maximum Continuous Drian Current vs. Ambient Temperature

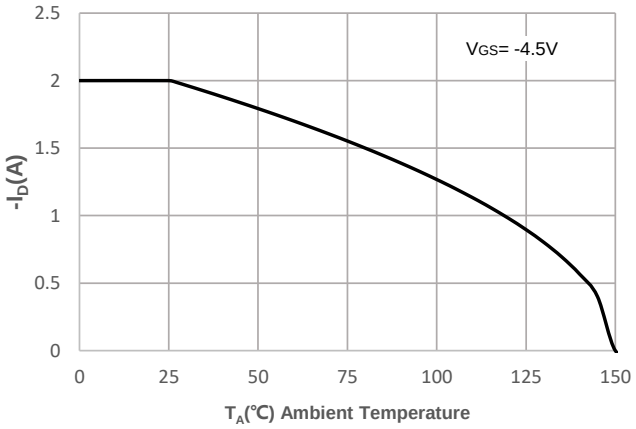

Figure 11: Normalized Maximum Transient Thermal Impedance

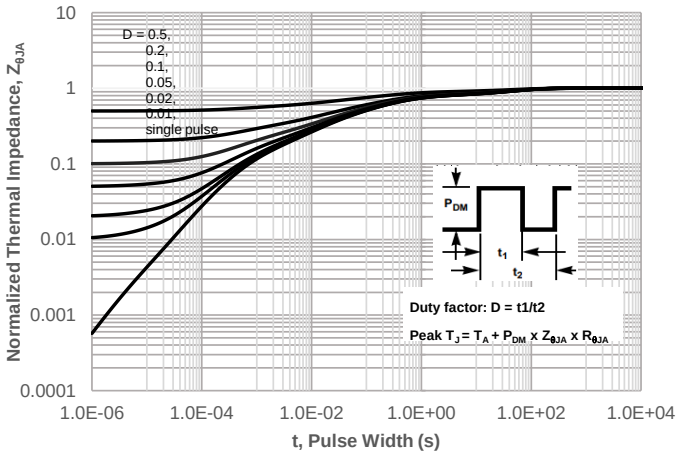

Figure 12: Peak Current Capacity

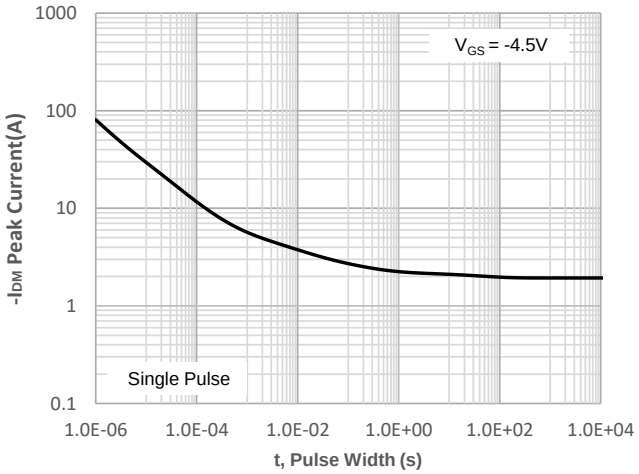

Test Circuit

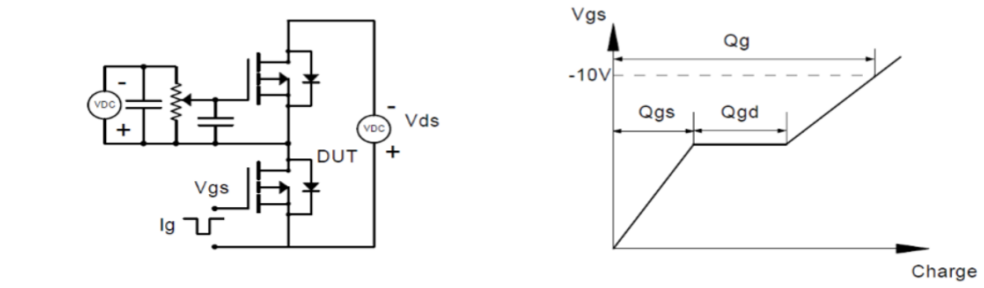

Figure 1: Gate Charge Test Circuit & Waveform

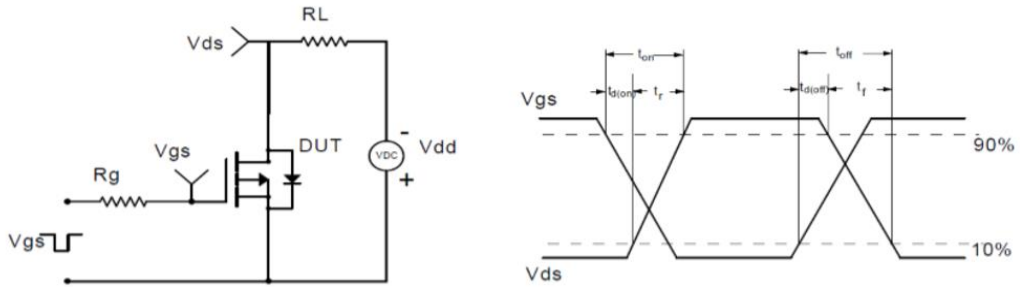

Figure 2: Resistive Switching Test Circuit & Waveform

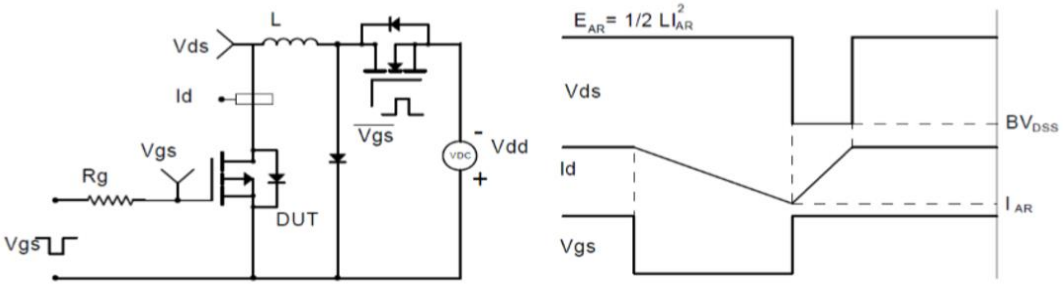

Figure 3: Unclamped Inductive Switching Test Circuit& Waveform

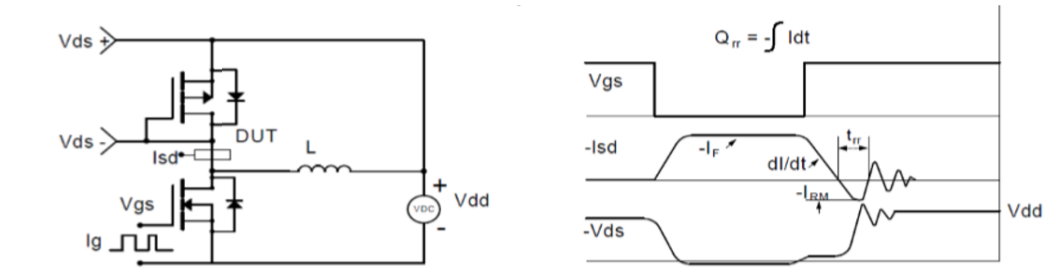

Figure 4: Diode Recovery Test Circuit & Waveform

Package Mechanical Data(SOT-23)

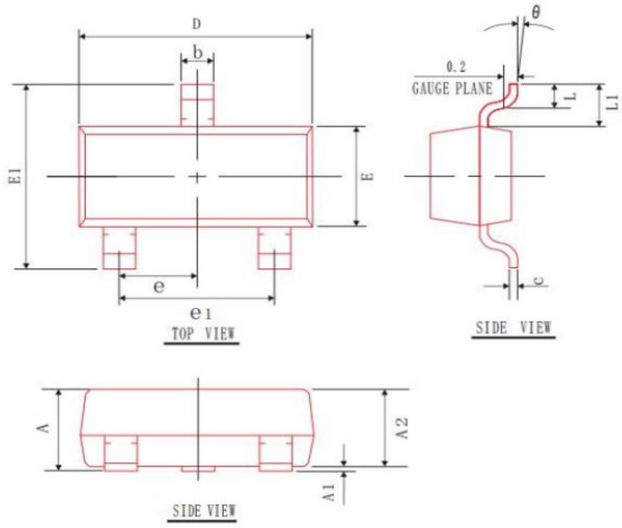

COMMON DIMENSIONS
(UNITS OF MEASURE=mm)

SYMBOL	MIN	NOM	MAX
A	0.90	1.05	1.20
A1	0.00	0.05	0.10
A2	0.90	1.00	1.10
b	0.30	0.40	0.50
c	0.08	0.10	0.15
D	2.80	2.90	3.00
E	1.20	1.30	1.40
E1	2.30	2.40	2.50
L	0.30	0.40	0.50
θ	0°	5°	10°
L1	0.55 REF		
e	0.95 BSC		
e1	1.90 REF		

Recommended Footprint



DIMENSIONS:MILLIMETERS

Information furnished in this document is believed to be accurate and reliable.
However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.
Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.
Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.
Copyright ©2023 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.