



Silicon Planar Zener Diodes: BZX84C Series


Rev.1.3

FEATURE

- ◇ Total power dissipation: max 300mW.
- ◇ Low zener impedance.
- ◇ High reliability and high stability.
- ◇ Voltage range includes breakdown voltages from 2.4V to 43V with $\pm 5\%$ for BZX84C series.



SOT-23



DESCRIPTION


- ◇ SOT-23 small outline plastic package
- ◇ Color band denotes cathode end
- ◇ Epoxy UL: 94V-0
- ◇ Mounting position: any

ABSOLUTE MAXIMUM RATINGS AND THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Total power dissipation @ $T_A=25^\circ\text{C}$	P_D	300	mW
Thermal resistance from junction to ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Junction temperature range	T_j	-65 to +150	$^\circ\text{C}$
Storage temperature range	T_s	-65 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Symbol	Parameter
V_Z	Reverse zener voltage at I_{ZT}
I_{ZT}	Reverse current
Z_{ZT}	Maximum zener impedance at I_{ZT}
I_R	Reverse leakage current at V_R
V_R	Reverse voltage
I_F	Forward current
V_F	Forward voltage at I_F

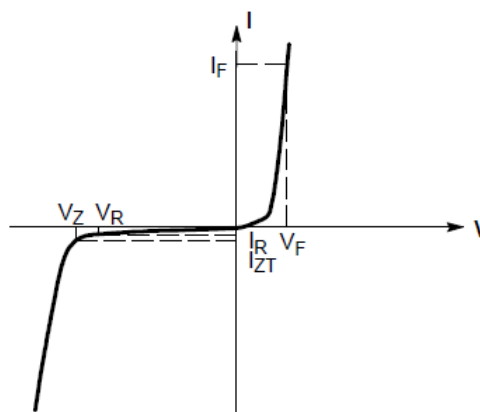


Zener voltage regulator

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

 Maximum $V_F=0.9\text{V}$ at $I_F=10\text{mA}$


Type number	Zener voltage range at I_{ZT}				Maximum zener impedance			Maximum reverse leakage current		Marking
	Nom (Volts)	Min (Volts)	Max (Volts)	I_{ZT} (mA)	Z_{ZT} (Ω)	Z_{ZK} (Ω)	I_{ZK} (mA)	I_R (μA)	V_R (Volts)	
BZX84C2V4	2.4	2.2	2.6	5	100	600	1.0	50	1.0	Z11
BZX84C2V7	2.7	2.5	2.9	5	100	600	1.0	20	1.0	Z12
BZX84C3V0	3.0	2.8	3.2	5	95	600	1.0	10	1.0	Z13
BZX84C3V3	3.3	3.1	3.5	5	95	600	1.0	5	1.0	Z14
BZX84C3V6	3.6	3.4	3.8	5	90	600	1.0	5	1.0	Z15
BZX84C3V9	3.9	3.7	4.1	5	90	600	1.0	3	1.0	Z16
BZX84C4V3	4.3	4.0	4.6	5	90	600	1.0	3	1.0	Z17
BZX84C4V7	4.7	4.4	5.0	5	80	500	1.0	3	2.0	Z1
BZX84C5V1	5.1	4.8	5.4	5	60	480	1.0	2	2.0	Z2
BZX84C5V6	5.6	5.2	6.0	5	40	400	1.0	1	2.0	Z3
BZX84C6V2	6.2	5.8	6.6	5	10	150	1.0	3	4.0	Z4
BZX84C6V8	6.8	6.4	7.2	5	15	80	1.0	2	4.0	Z5
BZX84C7V5	7.5	7.0	7.9	5	15	80	1.0	1	5.0	Z6
BZX84C8V2	8.2	7.7	8.7	5	15	80	1.0	0.7	5.0	Z7
BZX84C9V1	9.1	8.5	9.6	5	15	100	1.0	0.5	6.0	Z8
BZX84C10	10	9.4	10.6	5	20	150	1.0	0.2	7.0	Z9
BZX84C11	11	10.4	11.6	5	20	150	1.0	0.1	8.0	Y1 •
BZX84C12	12	11.4	12.7	5	25	150	1.0	0.1	8.0	Y2 •
BZX84C13	13	12.4	14.1	5	30	170	1.0	0.1	8.0	Y3
BZX84C15	15	13.8	15.6	5	30	200	1.0	0.1	10.5	Y4
BZX84C16	16	15.3	17.1	5	40	200	1.0	0.1	11.2	Y5
BZX84C18	18	16.8	19.1	5	45	225	1.0	0.1	12.6	Y6 •
BZX84C20	20	18.8	21.2	5	55	225	1.0	0.1	14.0	Y7
BZX84C22	22	20.8	23.3	5	55	250	1.0	0.1	15.4	Y8
BZX84C24	24	22.8	25.6	5	70	250	1.0	0.1	16.8	Y9
BZX84C27	27	25.1	28.9	2	80	300	0.5	0.1	18.9	Y10
BZX84C30	30	28.0	32.0	2	80	300	0.5	0.1	21.0	Y11 •
BZX84C33	33	31.0	35.0	2	80	325	0.5	0.1	23.1	Y12
BZX84C36	36	34.0	38.0	2	90	350	0.5	0.1	25.2	Y13
BZX84C39	39	37.0	41.0	2	130	350	0.5	0.1	27.3	Y14
BZX84C43	43	40.0	46.0	2	100	700	1.0	0.1	32	Y15

PACKAGE MECHANICAL DATA

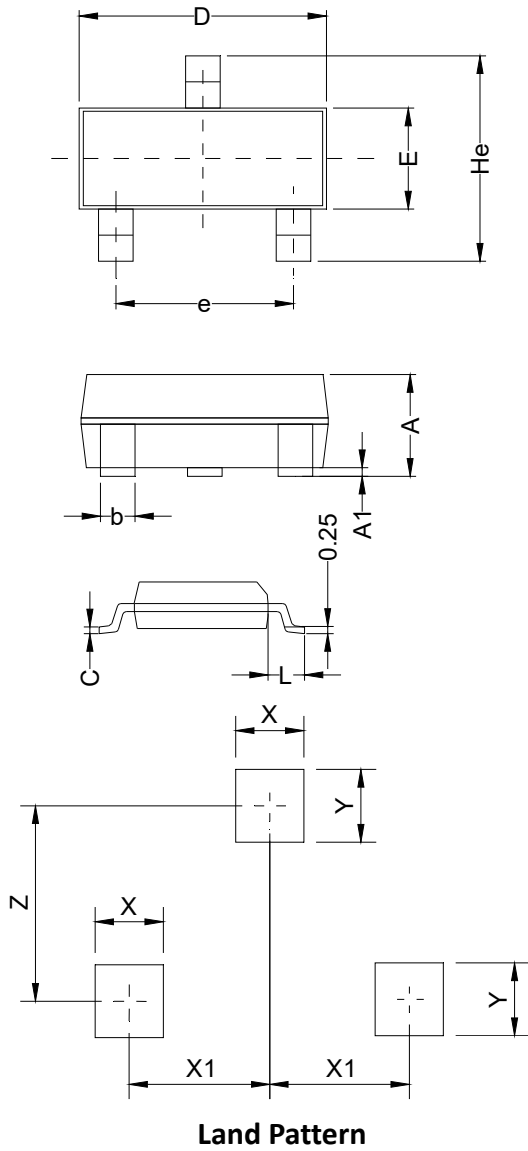

Symbol	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	1.063	1.15	0.035	0.042	0.045
A1	0.00	0.075	0.14	0.000	0.003	0.006
b	0.30	0.40	0.50	0.012	0.016	0.020
C	0.07	0.10	0.15	0.003	0.004	0.006
D	2.80	2.90	3.00	0.110	0.114	0.118
e	1.80	1.90	2.00	0.071	0.075	0.079
E	1.20	1.30	1.40	0.047	0.051	0.055
L	0.55REF			0.022REF		
He	2.25	2.40	2.55	0.089	0.094	0.100
X	0.80			0.031		
X1	0.95			0.037		
Y	0.80			0.031		
Z	2.02			0.080		

TAPE AND REEL SPECIFICATION-SOT-23

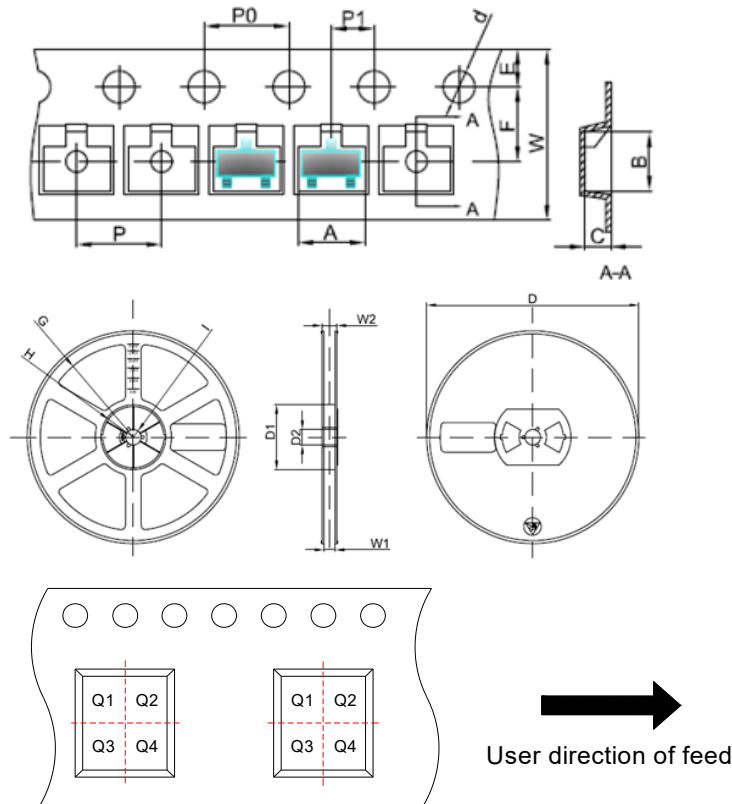

Pin 1 quadrant: Q3

Packaging Description:

SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative(carbon filled) polycarbonate resin. The cover tape is a multilayer film(heat activated adhesive in nature)primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000units per 7" or 17.8cm diameter reel. The reels are clear in color and made of polystyrene plastic(anti-static coated).

Symbol	Millimeters	Inches
	Typ.	Typ.
A	3.15	0.124
B	2.77	0.109
C	1.22	0.048
d	Φ1.50	Φ0.059
E	1.75	0.069
F	3.50	0.138
P0	4.00	0.157
P	4.00	0.157
P1	2.00	0.079
W	8.00	0.315
D	Φ178	Φ7.008
D1	54.40	2.142
D2	13.00	0.512
G	R78.00	R3.071
H	R25.60	R1.008
I	R6.50	R0.256
W1	9.50	0.374
W2	12.30	0.484

ORDERING INFORMATION

Part Number	Package	Reel Size	Quantity Per Reel
BZX84C Series	SOT-23	7 Inch	3,000 pcs

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

Fig.1 Power dissipation vs ambient temperature

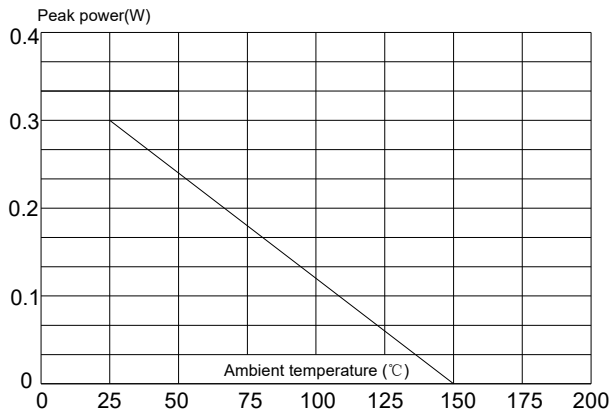


Fig.2 Zener breakdown characteristics

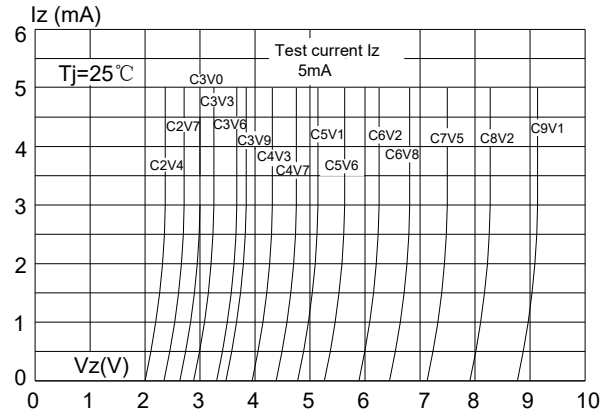


Fig.3 Zener breakdown characteristics


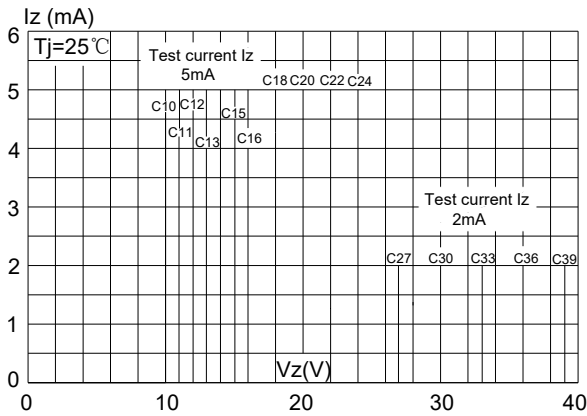


Fig.4 Zener breakdown characteristics

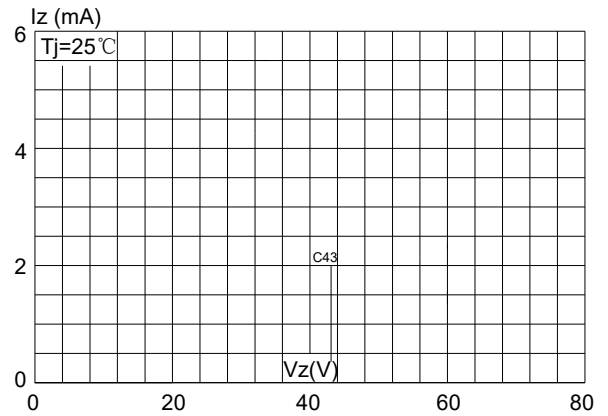

JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.3rd version which is made in 7-Apr.-2024. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright ©2024 Jiangsu JieJie Microelectronics Co., Ltd. Printed All rights reserved.