




Zener Diodes with Surge Current Specification: SMAZHCxxAU


Rev.1.6

FEATURE

- ✧ Silicon power zener diodes.
- ✧ Low zener impedance.
- ✧ 1000mW rating on FR-4 or FR-5 board.
- ✧ Voltage range includes breakdown voltages from 9.1V to 100V with $\pm 5\%$ for SMAZHCxxAU series.
- ✧ Low profile surface-mount package.
- ✧ Zener and surge current specification.
- ✧ For use in stabilizing and clamping circuits with high power rating.
- ✧ Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C.
- ✧ AEC-Q101 qualified.



SMA




ABSOLUTE MAXIMUM RATINGS AND THERMAL CHARACTERISTICS

Parameter	Symbol	Max Value	Unit
Total power dissipation @75°C	P_D	1000	mW
Thermal resistance junction to ambient (Note1)	$R_{\theta JA}$	120	°C/W
Junction temperature	T_J	150	°C
Storage temperature range	T_S	-55 to +150	°C
Operating temperature range	T_{op}	-55 to +150	°C
Peak pulse power dissipation at 10/1000μs waveform	P_{PP}	200	W


Notes1: Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

Symbol	Parameter
V_Z	Reverse zener voltage at I_{zt}
I_{zt}	Reverse current
I_R	Reverse leakage current at V_R
V_R	Reverse voltage
I_F	Forward current
V_F	Forward voltage at I_F

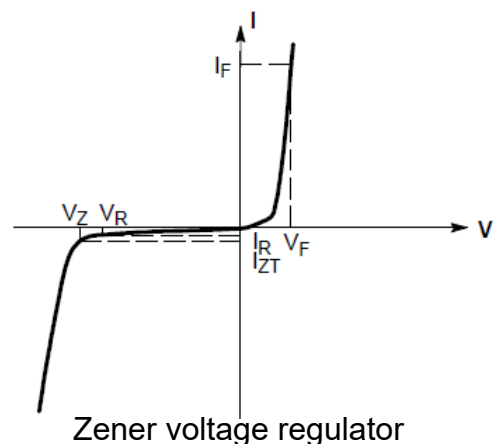

MARKING

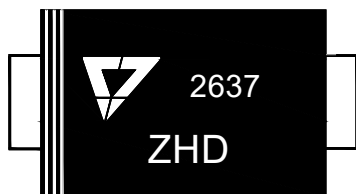

ZHD: Device Marking Code
2637: the 37th week, 2026

SMAZHCxxAU ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Maximum $V_F=1.2\text{V}$ at $I_F=200\text{mA}$

Type number	Zener voltage range at I_{zt}				Maximum zener impedance			Maximum reverse leakage current		Marking code
	Nom (Volts)	Min (Volts)	Max (Volts)	I_{zt} (mA)	Z_{zt} (Ω)	Z_{zk} (Ω)	I_{zk} (mA)	I_R (μA)	V_R (Volts)	
SMAZHC9V1AU	9.1	8.65	9.56	28	5.0	700	0.5	10	7	ZHD
SMAZHC10AU	10	9.5	10.5	25	7.0	700	0.25	10	7.6	ZHE
SMAZHC11AU	11	10.5	11.6	23	8.0	700	0.25	5	8.4	ZHF
SMAZHC12AU	12	11.4	12.6	21	9.0	700	0.25	1	9.1	ZHG
SMAZHC13AU	13	12.4	13.7	19	10	700	0.25	1	9.9	ZHH
SMAZHC15AU	15	14.3	15.8	17	14	700	0.25	1	11.4	ZHI
SMAZHC16AU	16	15.2	16.8	15.5	16	700	0.25	1	12.2	ZHJ
SMAZHC18AU	18	17.1	18.9	14	20	750	0.25	1	13.7	ZHK
SMAZHC20AU	20	19.0	21.0	12.5	22	750	0.25	1	15.2	ZHL
SMAZHC22AU	22	20.9	23.1	11.5	23	750	0.25	1	16.7	ZHM
SMAZHC24AU	24	22.8	25.2	10.5	25	750	0.25	1	18.2	ZHN
SMAZHC27AU	27	25.7	28.4	9.5	35	750	0.25	1	20.6	ZHO
SMAZHC30AU	30	28.5	31.5	8.5	40	1000	0.25	1	22.8	ZHP
SMAZHC33AU	33	31.4	34.7	7.5	45	1000	0.25	1	25.1	ZHQ
SMAZHC36AU	36	34.2	37.8	7.0	50	1000	0.25	1	27.4	ZHR
SMAZHC39AU	39	37.1	41.0	6.5	60	1000	0.25	1	29.7	ZHS
SMAZHC43AU	43	40.9	45.2	6.0	70	1500	0.25	1	32.7	ZHT
SMAZHC47AU	47	44.7	49.4	5.5	80	1500	0.25	1	35.8	ZHU
SMAZHC51AU	51	48.5	53.6	5.0	95	1500	0.25	1	38.8	ZHV
SMAZHC56AU	56	53.2	58.8	4.5	110	2000	0.25	1	42.6	ZHW
SMAZHC62AU	62	58.9	65.1	4.0	125	2000	0.25	1	47.1	ZHX
SMAZHC68AU	68	64.6	71.4	3.7	150	2000	0.25	1	51.7	ZHY
SMAZHC75AU	75	71.3	78.8	3.3	175	2000	0.25	1	56.0	ZHZ
SMAZHC82AU	82	77.9	86.1	3.0	200	3000	0.25	1	62.2	ZIA
SMAZHC91AU	91	86.5	95.6	2.8	250	3000	0.25	1	69.2	ZIB
SMAZHC100AU	100	95	105	2.5	350	3000	0.25	1	76.0	ZIC

ORDERING INFORMATION


SMAZ	H	C	9V1	AU
Zener Diode Series			Voltage:9.1V	AEC-Q101 qualified
	Pd:1000mW	C:5% Vz Voltage tolerance		

PACKAGE MECHANICAL DATA

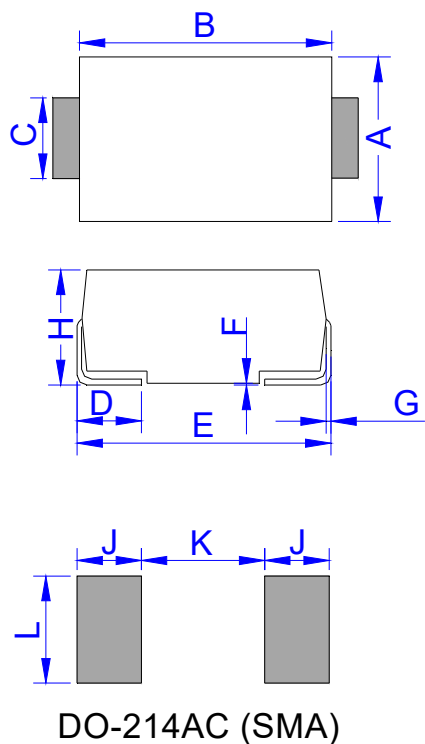

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.60	3.00	0.102	0.118
B	4.15	4.65	0.163	0.183
C	1.25	1.65	0.049	0.065
D	0.95	1.52	0.037	0.060
E	4.90	5.30	0.193	0.209
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.00	2.44	0.079	0.096
J	2.00		0.079	
K		2.30		0.091
L	1.80		0.071	

TAPE AND REEL SPECIFICATION-SMA

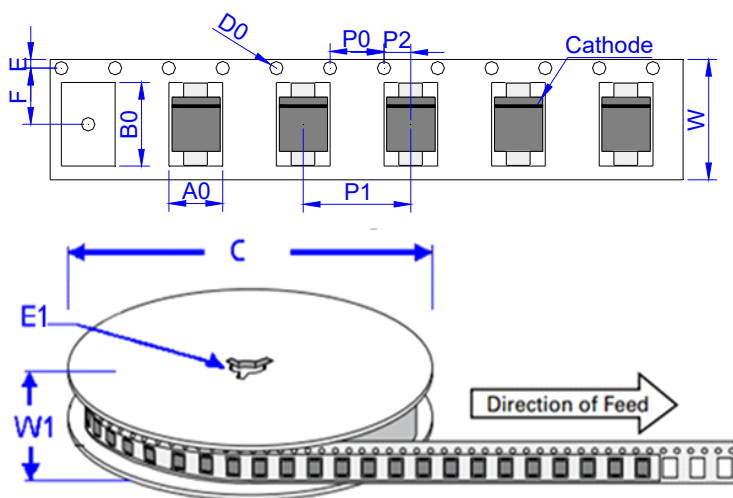

Ref.	Dimensions	
	Millimeters	Inches
A0	2.79 ± 0.3	0.110 ± 0.012
B0	5.33 ± 0.3	0.210 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	5.5 ± 0.2	0.217 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	4.00 ± 0.2	0.157 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	12.0 ± 0.2	0.472 ± 0.008
W1	15.7 ± 2.0	0.618 ± 0.079

PART No.	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
SMAZHCxxAU	0.066	7,500	120,000	13 inch reel pack

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

Fig.1 Power dissipation vs lead temperature

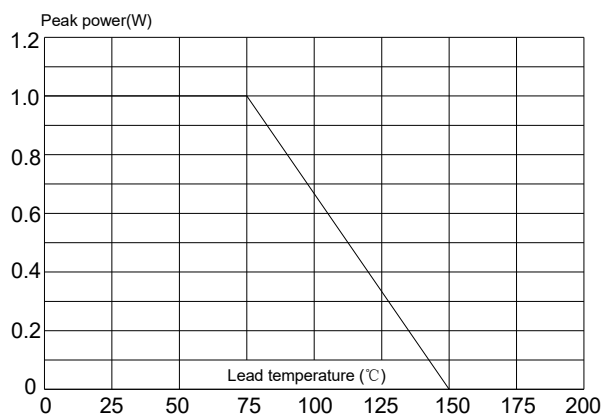


Fig.2 Zener breakdown characteristics

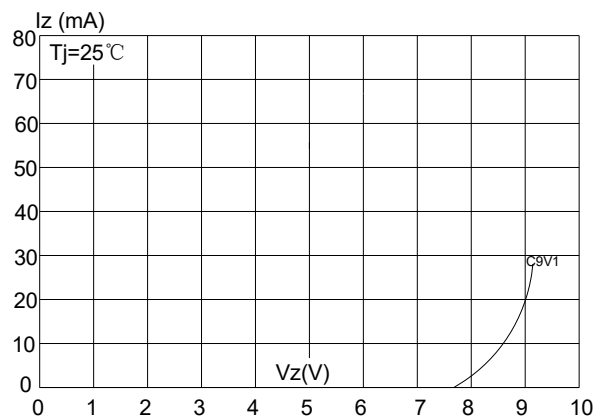


Fig.3 Zener breakdown characteristics


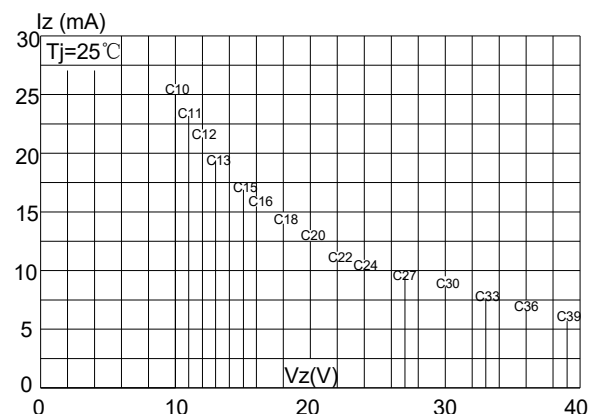


Fig.4 Zener breakdown characteristics

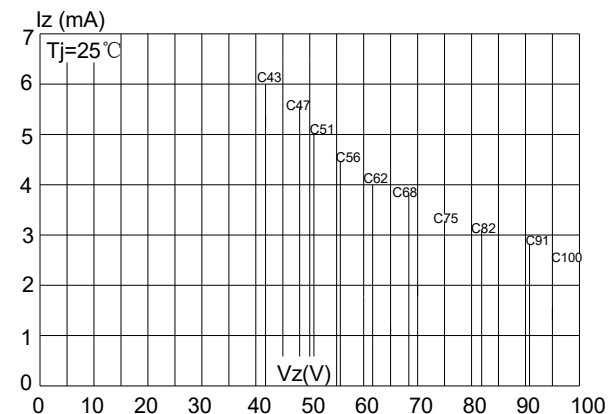

JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 1.6th version which is made in 11-Sep.-2026. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2026 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.