




ACJT210-8F 2A TRIACs

Rev.1.0

DESCRIPTION:

With high ability to withstand the shock loading of large current, ACJT210-8F triacs provide high dv/dt rate with strong resistance to electromagnetic interference. They are especially recommended for use on inductive load and serious electromagnetic interference place. Complying with UL standards (File ref: E252906). Package TO-220F is RoHS compliant. (2011/65/EU)

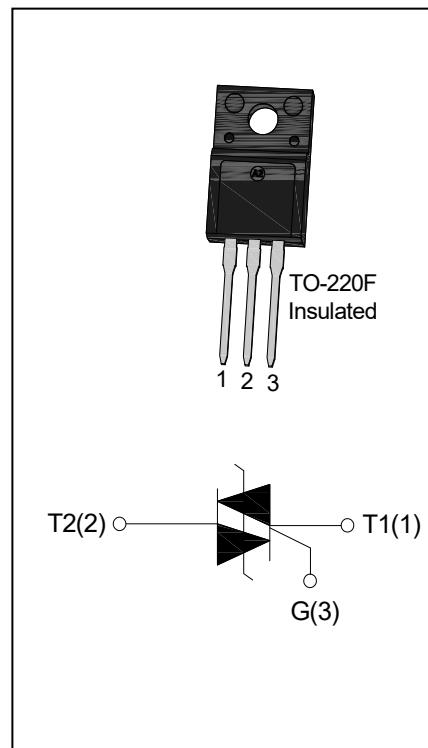

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	2	A
V_{DRM}/V_{RRM}	800	V
$I_{GT\text{ I/II/III}}$	10/10/10	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	°C
Operating junction temperature range	T_j	-40-125	°C
Repetitive peak off-state voltage($T_j=25^\circ\text{C}$)	V_{DRM}	800	V
Repetitive peak reverse voltage($T_j=25^\circ\text{C}$)	V_{RRM}	800	V
RMS on-state current TO-220F(Ins) ($T_c=100^\circ\text{C}$)	$I_{T(RMS)}$	2	A
Non repetitive surge peak on-state current (full cycle, $F=50\text{Hz}$)	I_{TSM}	20	A
Non repetitive surge peak on-state current (full cycle, $F=60\text{Hz}$)		22	A
I^2t value for fusing ($t_p=10\text{ms}$)	I^2t	2	A^2s
Rate of rise of on-state current ($I_G=2\times I_{GT}$)	dI/dt	80	$\text{A}/\mu\text{s}$
Peak gate current	I_{GM}	2	A

Average gate power dissipation	$P_{G(AV)}$	0.5	W
Peak gate power	P_{GM}	10	W

ELECTRICAL CHARACTERISTICS (T_j=25°C unless otherwise specified)

Symbol	Test Condition	Quadrant		Value	Unit
I _{GT}	V _D =12V R _L =33Ω	I - II -III	MAX	10	mA
V _{GT}		I - II -III	MAX	1	V
V _{GD}	V _D =V _{DRM} T _j =125°C R _L =3.3KΩ	I - II -III	MIN	0.2	V
I _L	I _G =1.2I _{GT}	I -III	MAX	25	mA
		II		35	
I _H	I _T =100mA		MAX	10	mA
dV/dt	V _D =540V Gate Open T _j =125°C		MIN	600	V/μs

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX)	Unit
V _{TM}	I _{TM} =3A tp=380μs	T _j =25°C	1.5	V
V _{TO}	Threshold voltage	T _j =125°C	0.99	V
R _d	Dynamic resistance	T _j =125°C	0.17	Ω
I _{DRM}	V _D =V _{DRM} V _R =V _{RRM}	T _j =25°C	5	μA
I _{RRM}		T _j =125°C	0.5	mA

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
R _{th(j-c)}	junction to case(AC)	TO-220F(lns)	5.5	°C/W

ORDERING INFORMATION

AC	J	T	2	10	-8	F
<u>AC switch</u>						
<u>JieJie Microelectronics Co.,Ltd</u>						
		Triacs				
			<u>I_{T(RMS)}:2A</u>			
				<u>10: I_{G(T1-3)}≤10mA</u>		
						<u>F:TO-220F(Ins)</u>
					8: <u>V_{DRM} / V_{RRM}≥800V</u>	

MARKING

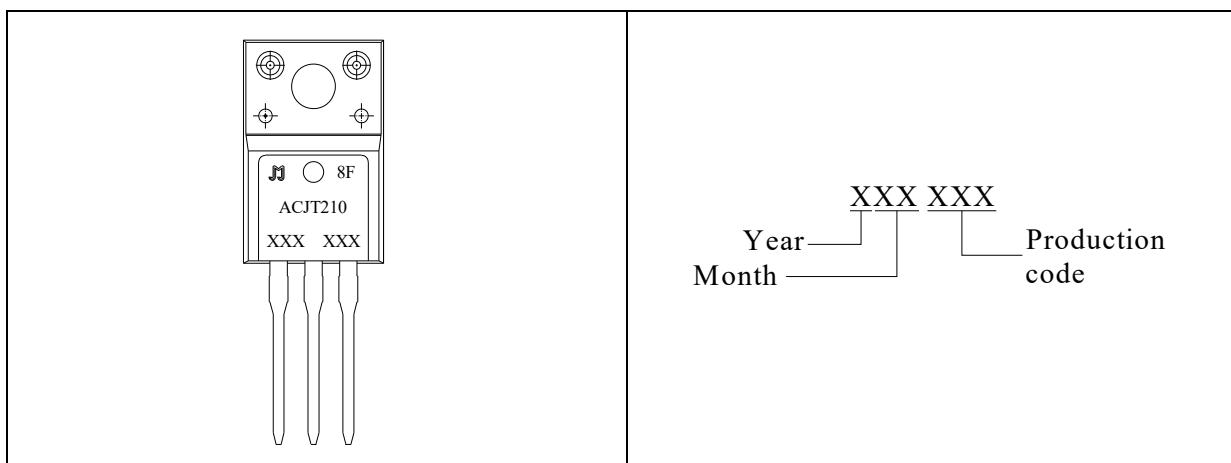
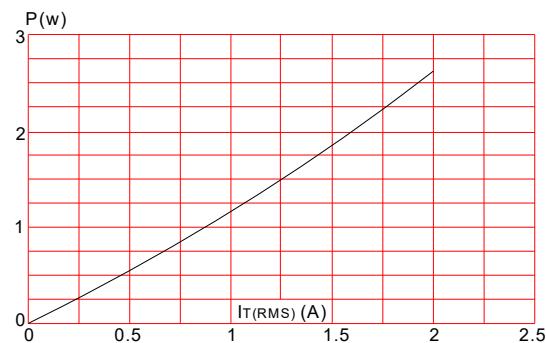
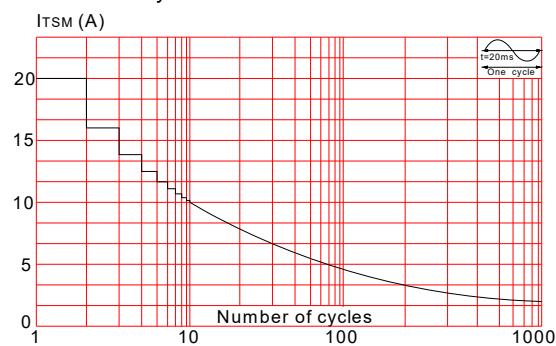
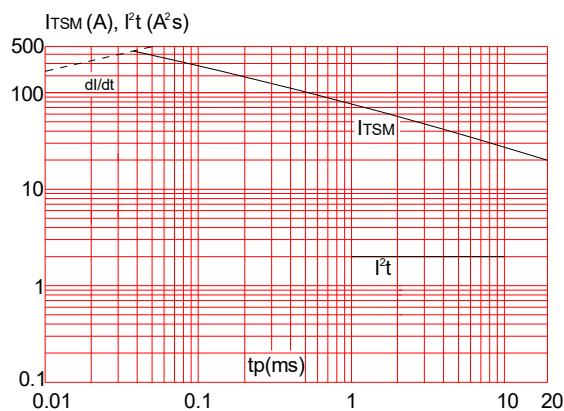
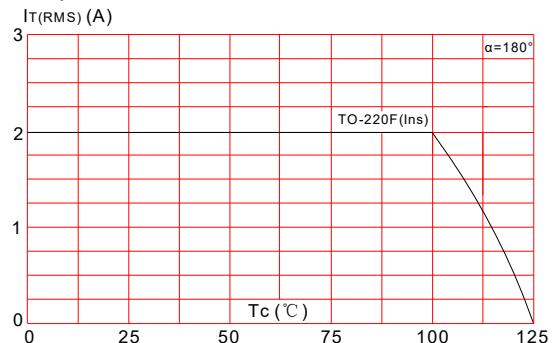
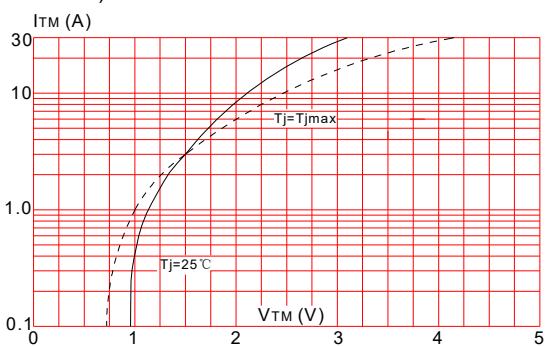
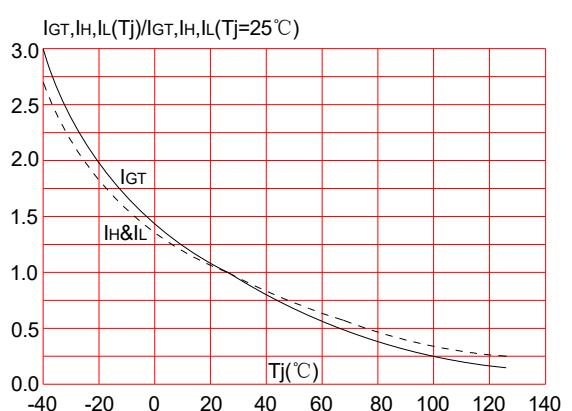


FIG.1: Maximum power dissipation versus RMS on-state current**FIG.3:** Surge peak on-state current versus number of cycles**FIG.5:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$ and corresponding value of I^2t ($dI/dt < 80\text{A}/\mu\text{s}$)**FIG.2:** RMS on-state current versus case temperature**FIG.4:** On-state characteristics (maximum values)**FIG.6:** Relative variations of gate trigger current, holding current and latching current versus junction temperature


ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		I - II -III			
ACJT210-8F	800	10	TO-220F(Ins)	50	Tube

Document Revision History


Date	Revision	Changes
Nov 25, 2022	1	Last update

PACKAGE MECHANICAL DATA

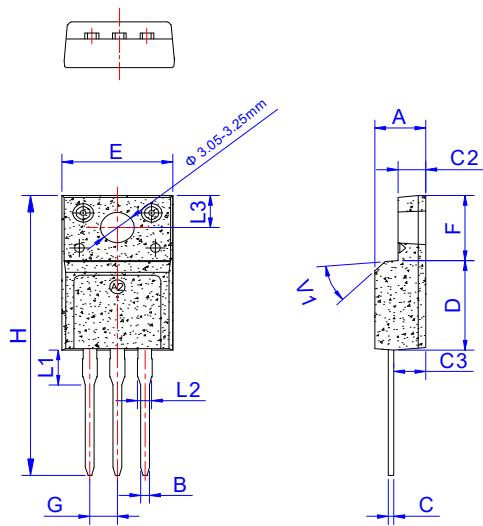

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G	2.40		2.70	0.094		0.106
H	28.0		29.8	1.102		1.173
L1	3.20		3.80	0.126		0.150
L2	1.14		1.70	0.045		0.067
L3	3.20		3.60	0.126		0.142
V1		45°			45°	

DELIVERY MODE

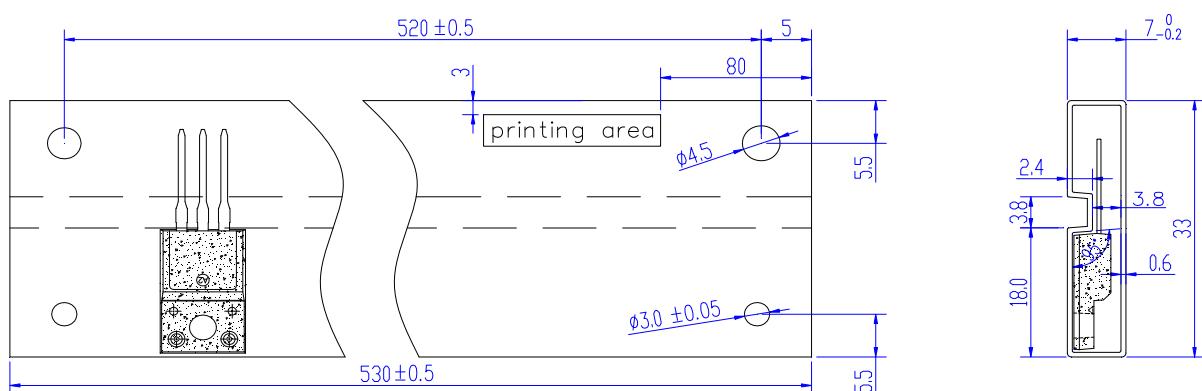

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-220F	TUBE	50	1,000	5,000



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2022 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.