



JX012 Series Sensitive Gate SCRs


Rev.11.0

DESCRIPTION:

The JX012 SCR series provide high dv/dt rate with strong resistance to electromagnetic interface. They are especially recommended for use on residual current circuit breaker. Packages are RoHS compliant. (2011/6/EU)

MAIN FEATURES

| Symbol | Value | Unit |
|---------------------|------------|---------|
| $I_{T(RMS)}$ | 1 | A |
| I_{GT} | ≤ 200 | μA |
| V_{DRM} / V_{RRM} | 1000 | V |

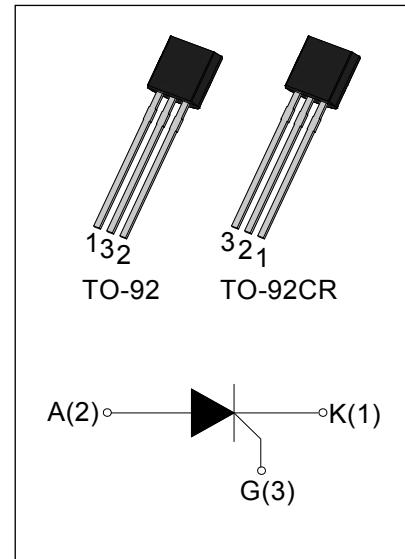

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Value | Unit |
|--|--------------|----------------------|-----------|
| Storage junction temperature range | T_{stg} | -40-150 | °C |
| Operating junction temperature range | T_j | -40-125 ^① | °C |
| Repetitive peak off-state voltage | V_{DRM} | 1000 | V |
| Repetitive peak reverse voltage | V_{RRM} | 1000 | V |
| Non repetitive peak off-state voltage | V_{DSM} | 1250 | V |
| Non repetitive peak reverse voltage | V_{RSM} | 1250 | V |
| RMS on-state current ($T_c=50^\circ C$) | $I_{T(RMS)}$ | 1 | A |
| Non repetitive surge peak on-state current ($t_p=10ms$) | I_{TSM} | 15 | A |
| I^2t value for fusing ($t_p=10ms$) | I^2t | 1.12 | A^2s |
| Critical rate of rise of on-state current | di/dt | 50 | $A/\mu s$ |
| Peak gate current ($t_p=20\mu s$, $T_j=125^\circ C$) | I_{GM} | 0.2 | A |
| Peak gate power ($t_p=20\mu s$, $T_j=125^\circ C$) | P_{GM} | 0.5 | W |
| Average gate power dissipation($T_j=125^\circ C$) | $P_{G(AV)}$ | 0.1 | W |

NOTE 1: When we parallel connect a $\leq 1K\Omega$ resistor between Gate and Cathode, the T_j can reach $125^\circ C$; if without this resistor, the T_j only can reach $110^\circ C$.

ELECTRICAL CHARACTERISTICS ($T_j=25^\circ\text{C}$ unless otherwise specified)

| Symbol | Test Condition | Value | | | Unit |
|----------|---|-------|------|------|------------------|
| | | MIN. | TYP. | MAX. | |
| I_{GT} | $V_D=12\text{V}$ $R_L=33\Omega$ | 20 | 50 | 200 | μA |
| V_{GT} | | - | 0.6 | 0.8 | V |
| V_{GD} | $V_D=V_{DRM}$ $T_j=125^\circ\text{C}$ | 0.2 | - | - | V |
| I_L | $I_G=1.2 I_{GT}$ | - | - | 4 | mA |
| I_H | $I_T=0.05\text{A}$ | - | - | 3 | mA |
| dV/dt | $V_{DM}=600\text{V}$ $T_j=125^\circ\text{C}$ $R_{GK}=1\text{K}\Omega$ | 100 | - | - | V/ μs |

STATIC CHARACTERISTICS

| Symbol | Parameter | | Value(MAX) | Unit |
|-----------|-------------------|----------------------|-------------------------|------|
| V_{TM} | $I_T=1.5\text{A}$ | $t_p=380\mu\text{s}$ | $T_j=25^\circ\text{C}$ | 1.55 |
| I_{DRM} | $V_D=V_{DRM}$ | $V_R=V_{RRM}$ | $T_j=25^\circ\text{C}$ | 5 |
| I_{RRM} | | | $T_j=125^\circ\text{C}$ | 100 |

THERMAL RESISTANCES

| Symbol | Parameter | | Value | Unit |
|---------------|------------------|-------|-------|---------------------------|
| $R_{th(j-c)}$ | junction to case | TO-92 | 75 | $^\circ\text{C}/\text{W}$ |

ORDERING INFORMATION

| | | | | | |
|---------------------------------|---|-----------------------------|---|---------------------------------|--|
| J | X | 012 | U | -TR | |
| JieJie Microelectronics Co.,Ltd | | | | B: Bulk pack TR: Tape & Reel | |
| Sensitive gate SCRs | | U:TO-92 CR:TO-92CR | | | |
| | | $I_T(\text{RMS}):1\text{A}$ | | | |

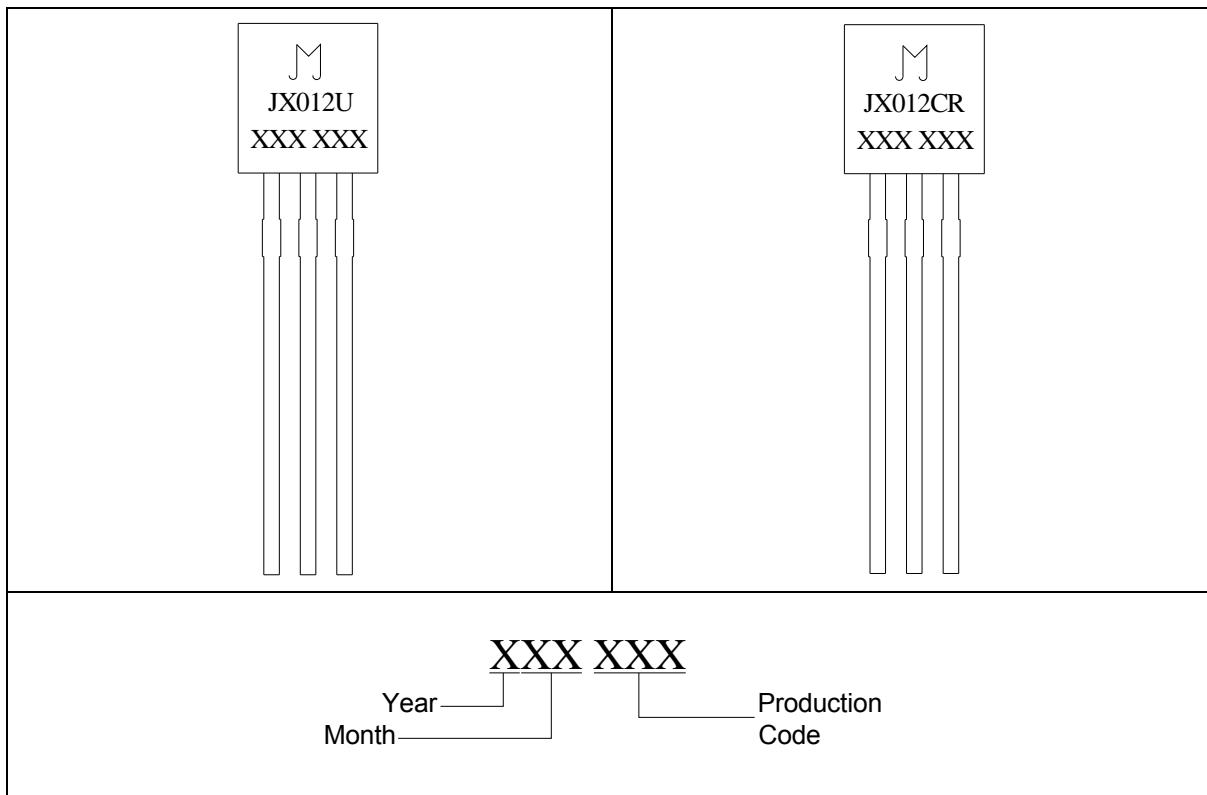
MARKING

FIG.1: Maximum power dissipation versus RMS on-state current

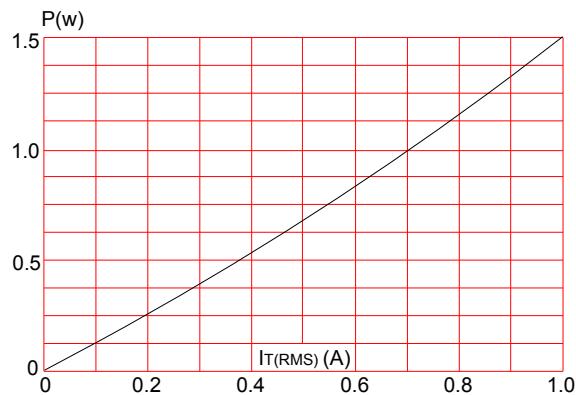


FIG.2: RMS on-state current versus case temperature

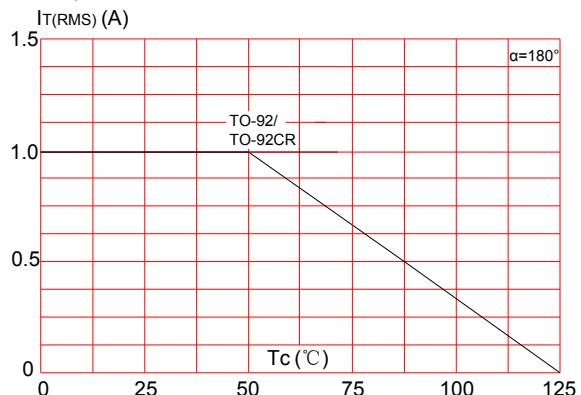


FIG.3: Surge peak on-state current versus number of cycles

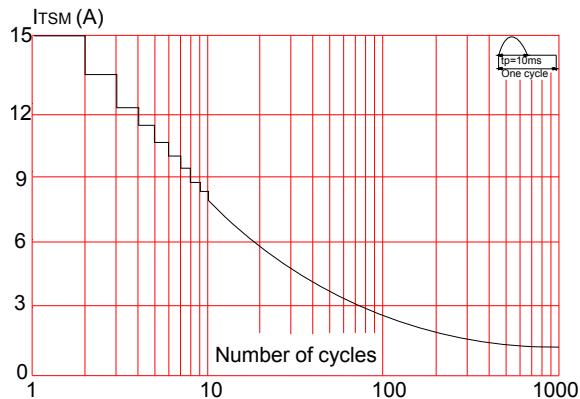


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $T_p < 10\text{ms}$, and corresponding value of I^2t ($dI/dt < 50\text{A}/\mu\text{s}$)

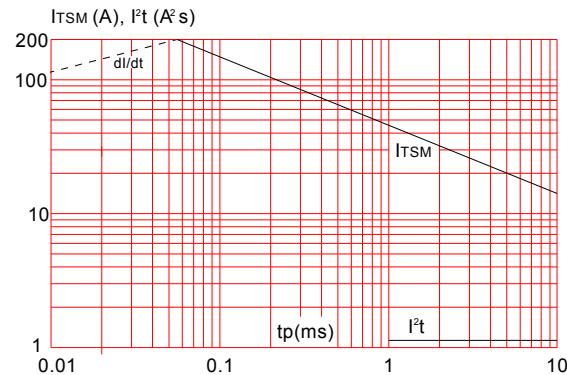


FIG.7: Relative variation of dV/dt immunity versus gate-cathode resistance (typical values)

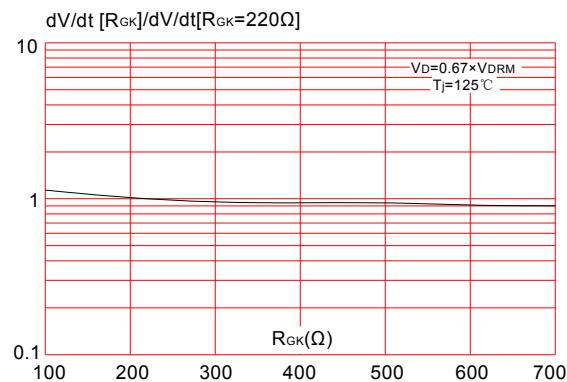


FIG.4: On-state characteristics (maximum values)

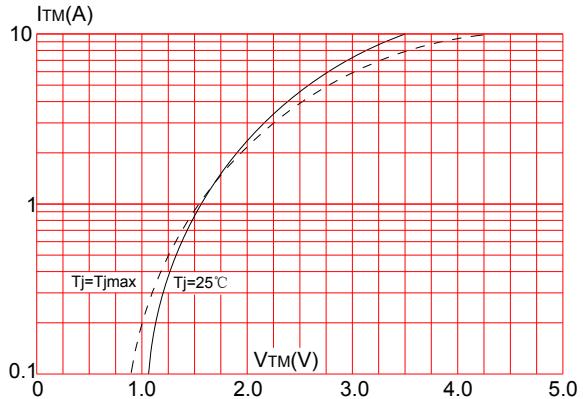


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature


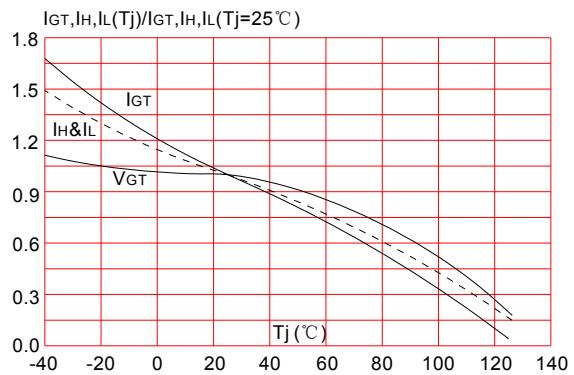


FIG.8: Relative variation of dV/dt immunity versus gate-cathode capacitor (typical values)

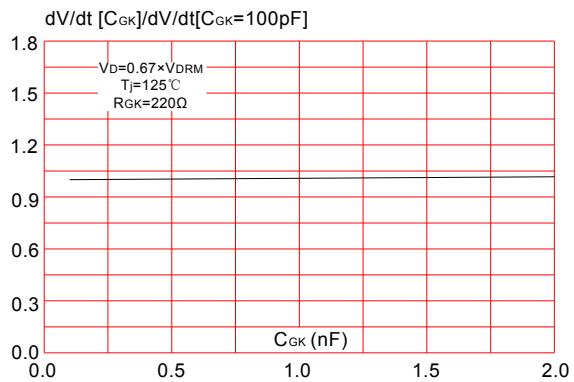


ORDERING INFORMATION

| Order code | Voltage V_{DSM}/V_{RSM} (V) | IGT(μ A) | Package | Base qty. (pcs) | Delivery mode |
|------------|-------------------------------------|---------------|---------|--------------------|---------------|
| JX012U | 1250 | ≤ 200 | TO-92 | 2,000 | Tape & Reel |
| JX012CR | | | TO-92CR | | |
| JX012U | | | TO-92 | 1,000 | Bulk pack |
| JX012CR | | | TO-92CR | | |

Document Revision History

| Date | Revision | Changes |
|----------------|----------|---|
| April 10, 2021 | 9 | Last update |
| May 4, 2021 | 10 | Add V_{DRM}/V_{RRM} |
| May 12, 2021 | 11 | Add characteristic curve Fig7&8 Renew curve6 |


PACKAGE MECHANICAL DATA

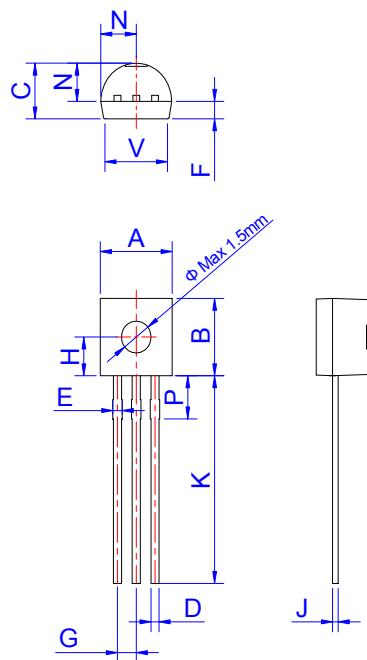

| Ref. | Dimensions | | | | | |
|------|-------------|------|-------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 4.45 | | 5.20 | 0.175 | | 0.205 |
| B | 4.32 | | 5.33 | 0.170 | | 0.210 |
| C | 3.18 | | 4.19 | 0.125 | | 0.165 |
| D | 0.407 | | 0.533 | 0.016 | | 0.021 |
| E | 0.50 | | 0.70 | 0.020 | | 0.028 |
| F | - | 1.1 | - | - | 0.043 | - |
| G | - | 1.27 | - | - | 0.050 | - |
| H | - | 2.30 | - | - | 0.091 | - |
| J | 0.36 | | 0.50 | 0.014 | | 0.020 |
| K | 12.70 | | 15.0 | 0.500 | | 0.591 |
| N | 2.04 | | 2.66 | 0.080 | | 0.105 |
| P | 1.86 | | 2.06 | 0.073 | | 0.081 |
| V | - | | 4.3 | - | | 0.169 |

DELIVERY MODE


| PACKAGE | OUTLINE | BAG (PCS) | INNER BOX (PCS) | CARTON BOX (PCS) |
|---------|-----------|--------------|--------------------|---------------------|
| TO-92 | Bulk Pack | 1,000 | 10,000 | 50,000 |

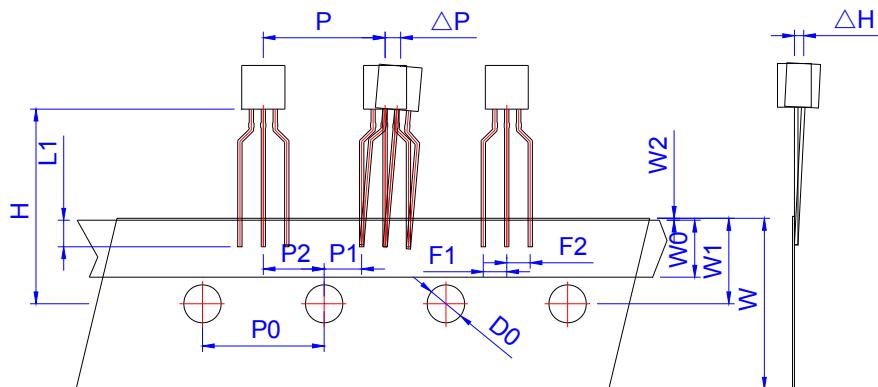

| Ref. | Dimensions | | | | | |
|------------|-------------|-------|-------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| P | 12.40 | 12.70 | 13.00 | 0.488 | 0.500 | 0.512 |
| P0 | 12.40 | 12.70 | 13.00 | 0.488 | 0.500 | 0.512 |
| P1 | 3.55 | 3.85 | 4.15 | 0.140 | 0.152 | 0.163 |
| P2 | 6.05 | 6.35 | 6.65 | 0.238 | 0.250 | 0.262 |
| ΔP | -1.0 | 0 | 1.0 | -0.039 | 0 | 0.039 |
| F1、F2 | 2.20 | 2.50 | 2.80 | 0.087 | 0.098 | 0.110 |
| F1-F2 | -0.3 | 0 | 0.3 | -0.012 | 0 | 0.012 |
| W | 17.50 | 18.00 | 19.00 | 0.689 | 0.709 | 0.748 |
| W0 | 5.50 | 6.00 | 6.50 | 0.217 | 0.236 | 0.256 |
| W1 | 8.50 | 9.00 | 9.50 | 0.335 | 0.354 | 0.374 |
| W2 | | | 1.0 | | | 0.039 |
| D0 | 3.80 | 4.0 | 4.20 | 0.150 | 0.157 | 0.165 |
| ΔH | -1.0 | 0 | 1.0 | -0.039 | 0 | 0.039 |
| L1 | 2.5 | | | 0.098 | | |
| H | 18.0 | 19.0 | 20.0 | 0.709 | 0.748 | 0.787 |

| PACKAGE | OUTLINE | REEL (PCS) | INNER BOX (PCS) | CARTON BOX (PCS) |
|---------|-------------|---------------|--------------------|---------------------|
| TO-92 | Tape & Reel | / | 2,000 | 20,000 |

PACKAGE MECHANICAL DATA

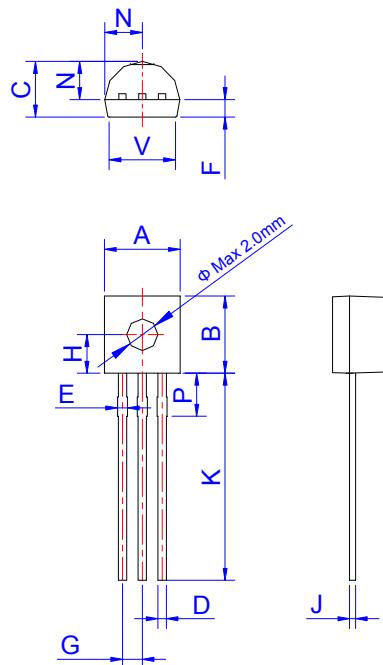

| Ref. | Dimensions | | | | | |
|------|-------------|-------|-------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 4.56 | | 5.00 | 0.179 | | 0.197 |
| B | 4.56 | | 5.00 | 0.179 | | 0.197 |
| C | 3.30 | | 3.60 | 0.130 | | 0.142 |
| D | 0.50 | | 0.60 | 0.020 | | 0.024 |
| E | 0.60 | | 0.80 | 0.020 | | 0.028 |
| F | - | 1.1 | - | | 0.043 | |
| G | - | 1.27 | - | - | 0.050 | - |
| H | - | 2.43 | - | - | 0.096 | - |
| J | 0.36 | | 0.50 | 0.014 | | 0.020 |
| K | 11.50 | 13.00 | 14.20 | 0.453 | 0.512 | 0.559 |
| N | 2.04 | | 2.66 | 0.080 | | 0.105 |
| P | 2.50 | | 2.90 | 0.098 | | 0.114 |
| V | - | | 4.3 | - | | 0.169 |

DELIVERY MODE

| PACKAGE | OUTLINE | BAG (PCS) | INNER BOX (PCS) | CARTON BOX (PCS) |
|---------|-----------|-----------|-----------------|------------------|
| TO-92CR | Bulk Pack | 1,000 | 10,000 | 50,000 |

| PACKAGE | OUTLINE | REEL (PCS) | INNER BOX (PCS) | CARTON BOX (PCS) |
|---------|-------------|------------|-----------------|------------------|
| TO-92CR | Tape & Reel | / | 2,000 | 20,000 |



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2021 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.