




### DESCRIPTION:

With high ability to withstand the shock loading of large current, JST20 series triacs provide high dv/dt rate with strong resistance to electromagnetic interface. With high commutation performances, 3 quadrants products especially recommended for use on inductive load.

From all three terminals to external heatsink, JST20A and JST20Z provide a rated insulation voltage of 2500 V<sub>RMS</sub>, and JST20F provides a rated insulation voltage of 2000V<sub>RMS</sub>, complying with UL standards (File ref: E252906).

### MAIN FEATURES

Symbol	Value	Unit
I <sub>T(RMS)</sub>	20	A
V <sub>DRM</sub> / V <sub>RRM</sub>	600/800/1200	V

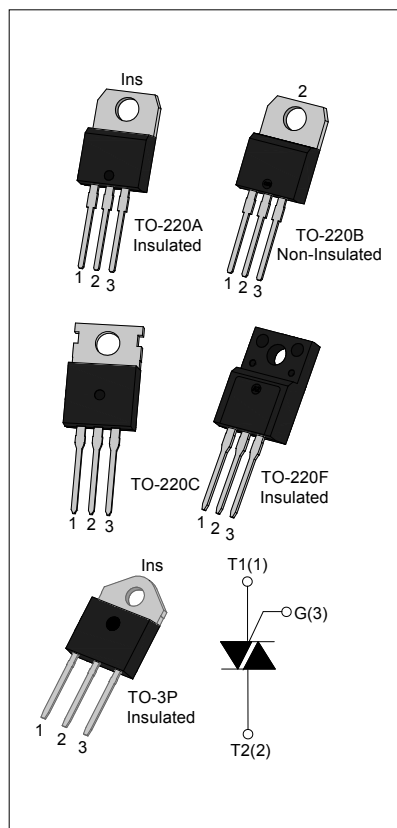

### ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T <sub>stg</sub>	-40-150	°C
Operating junction temperature range		T <sub>j</sub>	-40-125	°C
Repetitive peak off-state voltage (T <sub>j</sub> =25°C)		V <sub>DRM</sub>	600/800/1200	V
Repetitive peak reverse voltage (T <sub>j</sub> =25°C)		V <sub>RRM</sub>	600/800/1200	V
Non repetitive surge peak Off-state voltage		V <sub>DSM</sub>	V <sub>DRM</sub> +100	V
Non repetitive peak reverse voltage		V <sub>RSM</sub>	V <sub>RRM</sub> +100	V
RMS on-state current	TO-220A(Ins) (T <sub>C</sub> =70°C)	I <sub>T(RMS)</sub>	20	A
	TO-220B(Non-Ins)/ TO-220C (T <sub>C</sub> =90°C)			
	TO-220F(Ins) (T <sub>C</sub> =65°C)			
	TO-3P(Ins) (T <sub>C</sub> =105°C)			

Non repetitive surge peak on-state current (full cycle, F=50Hz)	$I_{TSM}$	200	A
$I^2t$ value for fusing ( $t_p=10ms$ )	$I^2t$	200	$A^2s$
Critical rate of rise of on-state current ( $I_G=2 \times I_{GT}$ )	$di/dt$	100	$A/\mu s$
Peak gate current	$I_{GM}$	4	A
Average gate power dissipation	$P_{G(AV)}$	1	W
Peak gate power	$P_{GM}$	10	W

**ELECTRICAL CHARACTERISTICS** ( $T_j=25^\circ C$  unless otherwise specified)

3 Quadrants

Symbol	Test Condition	Quadrant		Value		Unit
				BW	CW	
$I_{GT}$	$V_D=12V R_L=33\Omega$	I - II -III	MAX	50	35	mA
$V_{GT}$		I - II -III	MAX	1.3		V
$V_{GD}$	$V_D=V_{DRM} T_j=125^\circ C$ $R_L=3.3K\Omega$	I - II -III	MIN	0.2		V
$I_L$	$I_G=1.2I_{GT}$	I -III	MAX	70	60	mA
		II		90	70	
$I_H$	$I_T=100mA$		MAX	60	50	mA
$dV/dt$	$V_D=2/3V_{DRM}$ Gate Open $T_j=125^\circ C$		MIN	1000	500	$V/\mu s$

4 Quadrants

Symbol	Test Condition	Quadrant		Value	Unit
$I_{GT}$	$V_D=12V R_L=33\Omega$	I - II -III	MAX	50	mA
		IV		70	
$V_{GT}$		ALL	MAX	1.3	V
$V_{GD}$	$V_D=V_{DRM} T_j=125^\circ C$ $R_L=3.3K\Omega$	ALL	MIN	0.2	V
$I_L$	$I_G=1.2I_{GT}$	I -III-IV	MAX	70	mA
		II		90	
$I_H$	$I_T=100mA$		MAX	60	mA
$dV/dt$	$V_D=2/3V_{DRM}$ Gate Open $T_j=125^\circ C$		MIN	500	$V/\mu s$

**STATIC CHARACTERISTICS**

Symbol	Parameter		Value(MAX)	Unit
$V_{TM}$	$I_{TM} = 28A$ $t_p = 380\mu s$	$T_j = 25^\circ C$	1.5	V
$V_{TO}$	Threshold voltage	$T_j = 125^\circ C$	0.87	V
$R_d$	Dynamic resistance	$T_j = 125^\circ C$	23	mΩ
$I_{DRM}$	$V_D = V_{DRM}$ $V_R = V_{RRM}$	$T_j = 25^\circ C$	5	μA
$I_{RRM}$		$T_j = 125^\circ C$	2.5	mA


**THERMAL RESISTANCES**

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	junction to case(AC)	TO-220A(Ins)	2.4	°C/W
		TO-220B(Non-Ins)/ TO-220C	1.1	
		TO-220F(Ins)	2.1	
		TO-3P	0.7	


**ORDERING INFORMATION**

<p>JieJie Microelectronics Co.,Ltd</p>	<p><b>J</b></p> <p>Triacs</p> <p><math>I_{T(RMS)}: 20A</math></p> <p>A:TO-220A(Ins) F:TO-220F(Ins) B:TO-220B(Non-Ins) Z:TO-3P C:TO-220C</p>	<p><b>ST</b></p>	<p><b>20</b></p>	<p><b>Z</b></p>	<p><b>-800</b></p> <p>600:<math>V_{DRM} / V_{RRM} \geq 600V</math> 800:<math>V_{DRM} / V_{RRM} \geq 800V</math> 1200:<math>V_{DRM} / V_{RRM} \geq 1200V</math></p>	<p><b>BW</b></p> <p>BW:<math>I_{GT1-3} \leq 50mA</math> CW:<math>I_{GT1-3} \leq 35mA</math> B:<math>I_{GT1-3} \leq 50mA</math> <math>I_{GT4} \leq 70mA</math></p>	<p><b>-/</b></p> <p>Blank: Tube</p>
--	---	------------------	------------------	-----------------	--	---	-------------------------------------


**FIG.1** Maximum power dissipation versus RMS on-state current

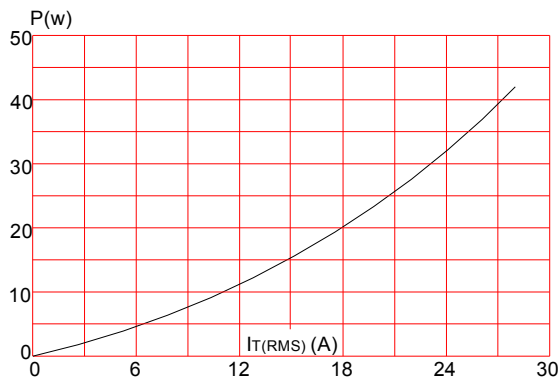


**FIG.3:** Surge peak on-state current versus number of cycles

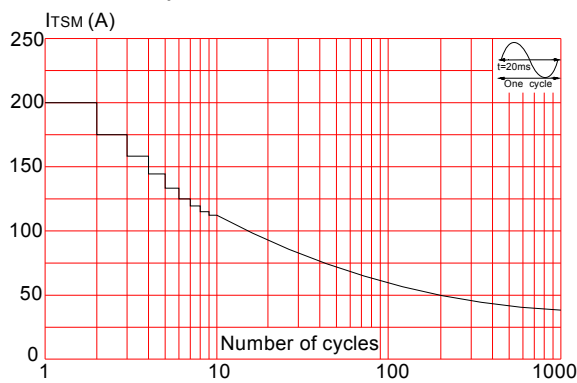


**FIG.5:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20\text{ms}$ , and corresponding value of  $I^2t$  ( $di/dt < 100\text{A}/\mu\text{s}$ )

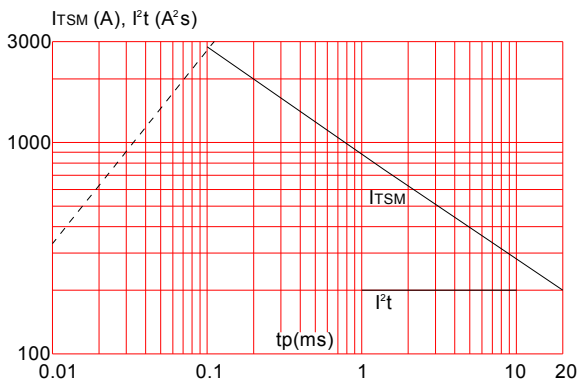


**FIG.2:** RMS on-state current versus case temperature

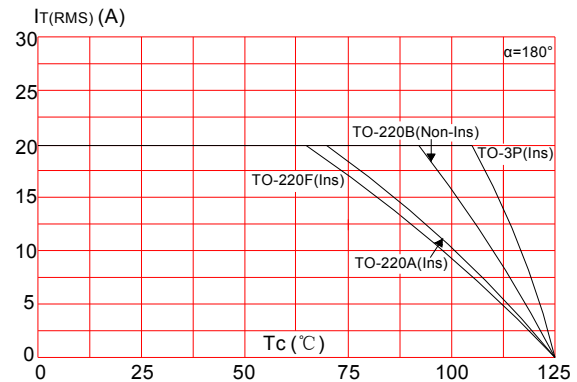

**FIG.4:** On-state characteristics (maximum values)

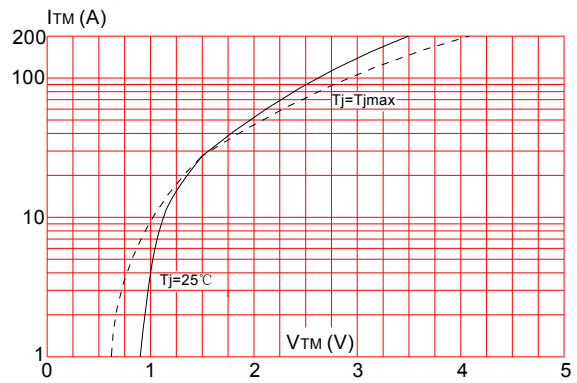

**FIG.6:** Relative variations of gate trigger current, holding current and latching current versus junction temperature

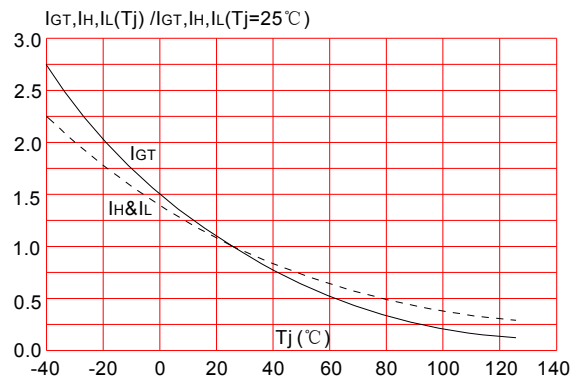


ORDERING INFORMATION

Order code	Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
JST20A-600/800/1200BW	600/800/1200	50		TO-220A(Ins)	50	Tube
JST20A-600/800/1200CW		35				
JST20B-600/800/1200BW		50		TO-220B (Non-Ins)		
JST20B-600/800/1200CW		35				
JST20C-600/800/1200BW		50		TO-220C		
JST20C-600/800/1200CW		35				
JST20F-600/800/1200BW		50		TO-220F(Ins)		
JST20F-600/800/1200CW		35				
JST20Z-600/800/1200BW		50		TO-3P(Ins)		
JST20Z-600/800/1200CW		35				
Order code	Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		I - II -III	IV			
JST20A-600/800/1200B	600/800/1200	50	70	TO-220A(Ins)	50	Tube
JST20B-600/800/1200B				TO-220B (Non-Ins)		
JST20C-600/800/1200B				TO-220C		
JST20F-600/800/1200B				TO-220F(Ins)		
JST20Z-600/800/1200B				TO-220F(Ins)		

**Document Revision History**


Date	Revision	Changes
Sep 2, 2020	9	Last update
Aug 14, 2021	10	Add VTO & Rd

PACKAGE MECHANICAL DATA

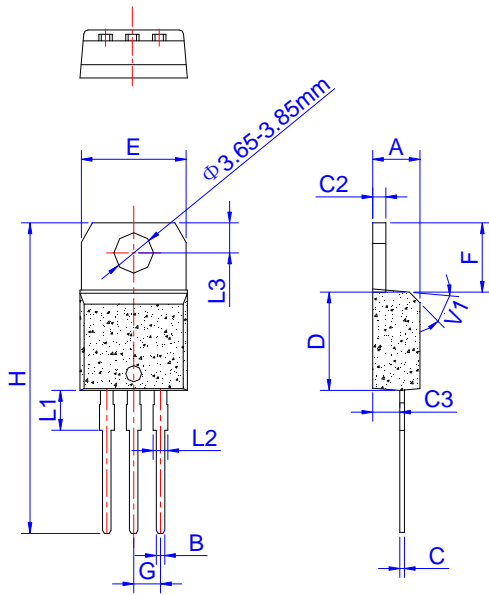


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.80		10.4	0.386		0.409
F	6.55		6.95	0.258		0.274
G	2.40		2.70	0.094		0.106
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

DELIVERY MODE

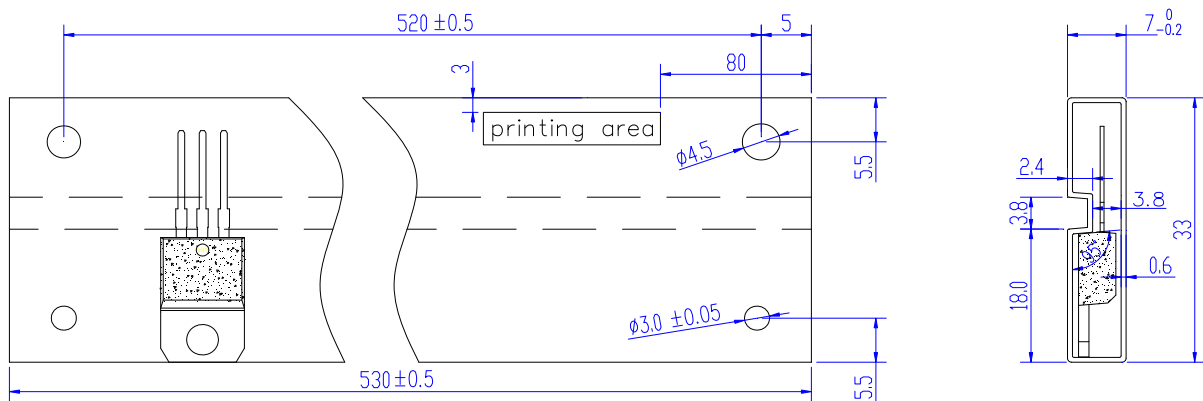


PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-220A	TUBE	50	1,000	5,000

PACKAGE MECHANICAL DATA

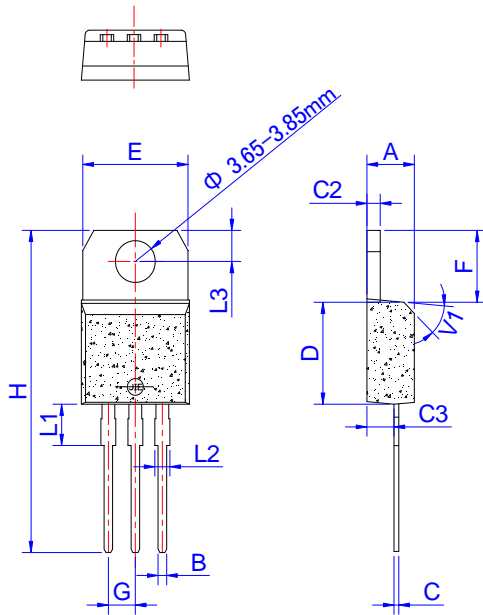

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G	2.40		2.70	0.094		0.106
H	28.0		29.8	1.102		1.173
L1		3.75			0.147	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	


DELIVERY MODE

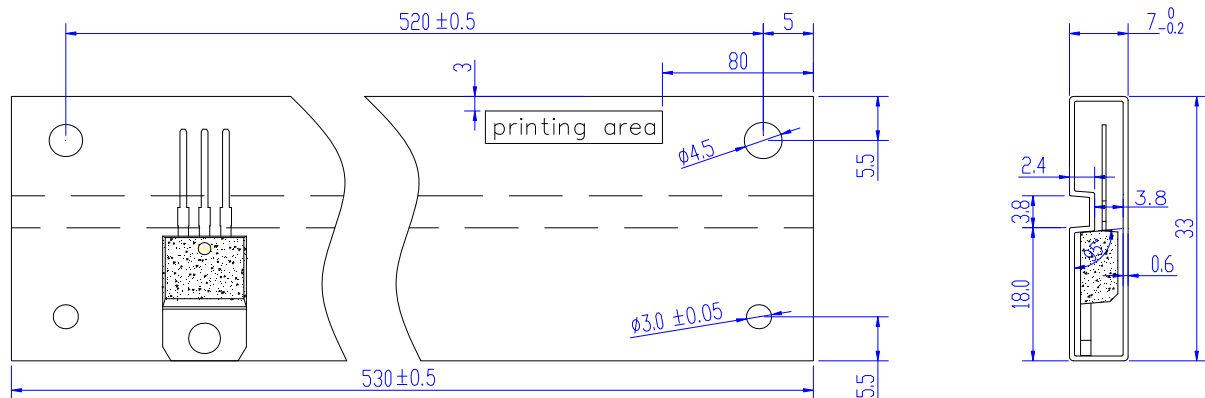

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-220B	TUBE	50	1,000	5,000




PACKAGE MECHANICAL DATA

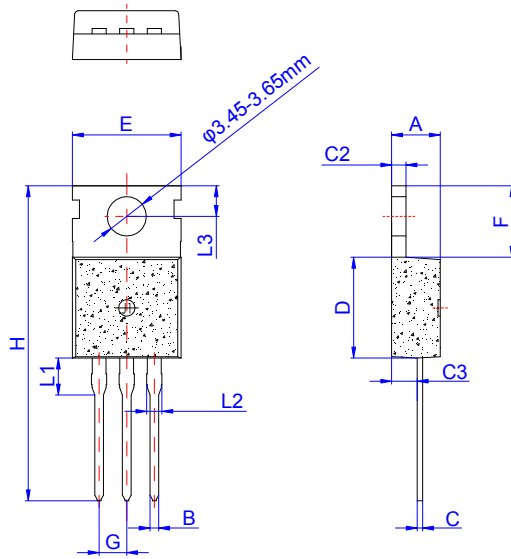


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.90		9.90	0.350		0.390
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116

DELIVERY MODE

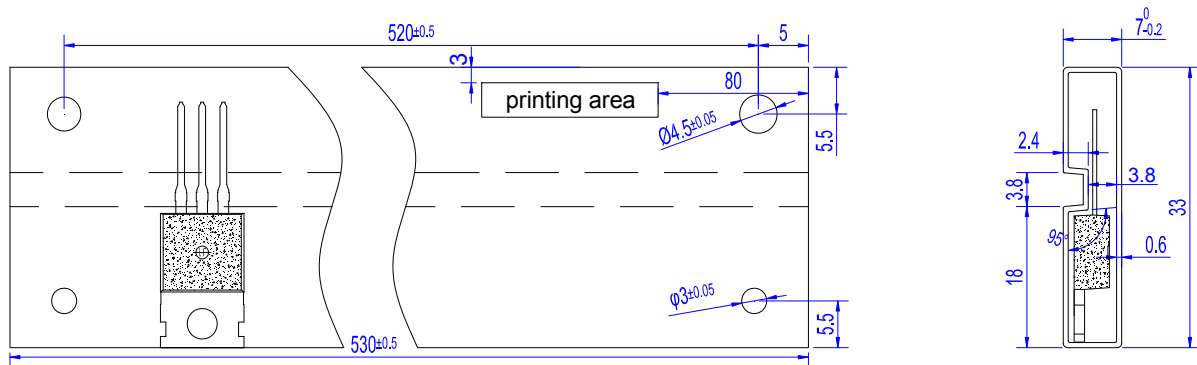


PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-220C	TUBE	50	1,000	5,000

PACKAGE MECHANICAL DATA

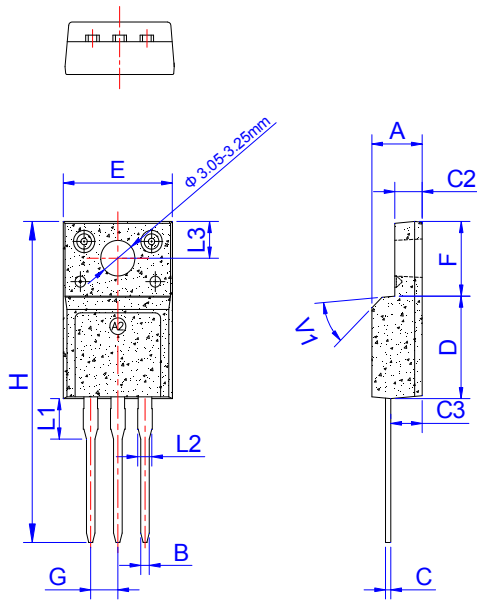


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G	2.40		2.70	0.094		0.106
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

DELIVERY MODE

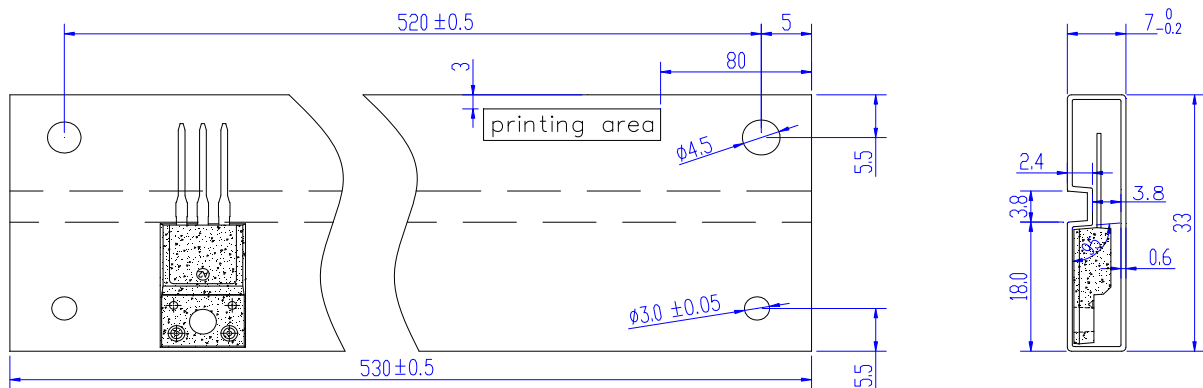


PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-220F	TUBE	50	1,000	5,000

**PACKAGE MECHANICAL DATA**

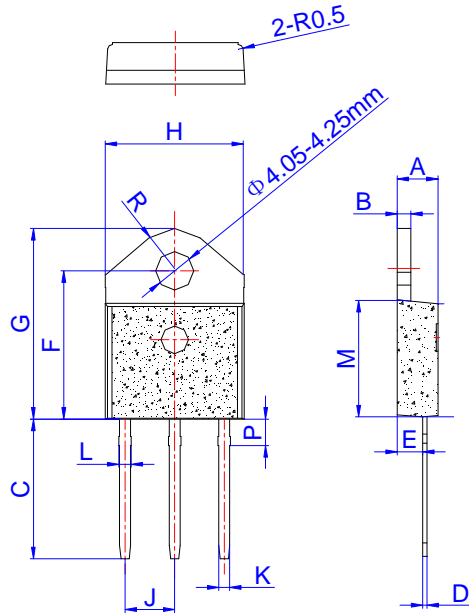

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.50		0.70	0.020		0.028
E	2.70		2.90	0.106		0.114
F	15.80		16.50	0.622		0.650
G	20.40		21.10	0.803		0.831
H	15.10		15.50	0.594		0.610
J	5.40		5.65	0.213		0.222
K	1.10		1.40	0.043		0.055
L	1.25		1.45	0.049		0.057
M	12.37		12.77	0.487		0.503
P	2.80		3.00	0.110		0.118
R		4.35			0.171	

**DELIVERY MODE**

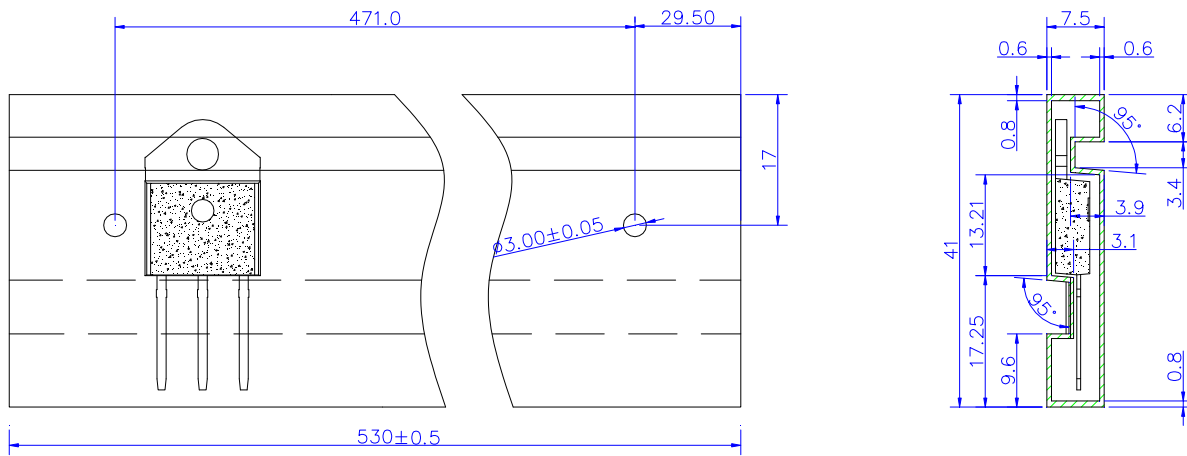

PACKAGE	OUTLINE	TUBE (PCS)	INNER BOX (PCS)	PER CARTON
TO-3P	TUBE	30	450	2,250



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.  
Copyright ©2021 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.