




JST30A-800BW 30A TRIAC

Rev.1

DESCRIPTION:

With high ability to withstand the shock loading of large current, it provides high dv/dt rate with strong resistance to electromagnetic interface. JST30A-800BW is snubberless triac product, which are especially recommended focus on inductive load for its high commutation performances. From all three terminals to external heatsink, JST30A-800BW provide a rated insulation voltage of 2500 V_{RMS}, complying with UL standards (File ref: E252906). package TO-220A is RoHS compliant (2011/65/EU).

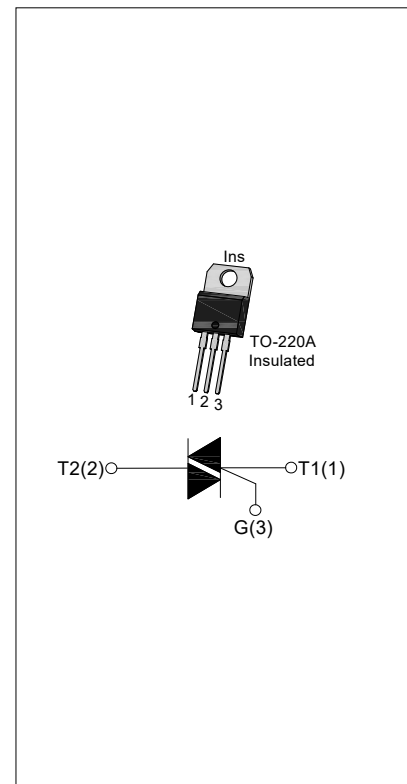

MAIN FEATURES

| Symbol | Value | Unit |
|--|-------|------|
| I _{T(RMS)} | 30 | A |
| V _{DRM} /V _{R_{RRM}} | 800 | V |

ABSOLUTE MAXIMUM RATINGS

| Parameter | | Symbol | Value | Unit |
|--|--|------------------------------|-----------------------------------|------------------|
| Storage junction temperature range | | T _{stg} | -40-150 | °C |
| Operating junction temperature range | | T _j | -40-125 | °C |
| Repetitive peak off-state voltage (T _j =25°C) | | V _{DRM} | 800 | V |
| Repetitive peak reverse voltage (T _j =25°C) | | V _{R_{RRM}} | 800 | V |
| Non repetitive surge peak off-state voltage | | V _{DSM} | V _{DRM} +100 | V |
| Non repetitive peak reverse voltage | | V _{RSM} | V _{R_{RRM}} +100 | V |
| RMS on-state current | TO-220A(Ins) (T _C =60°C) | I _{T(RMS)} | 30 | A |
| Non repetitive surge peak on-state current (full cycle, F=50Hz) | | I _{TSM} | 300 | A |
| I ² t value for fusing (tp=10ms) | | I ² t | 450 | A ² s |
| Critical rate of rise of on-state current (I _G =2 × I _{GT}) | | di/dt | 50 | A/μs |
| Peak gate current | | I _{GM} | 4 | A |

| | | | |
|--------------------------------|-------------|----|---|
| Average gate power dissipation | $P_{G(AV)}$ | 1 | W |
| Peak gate power | P_{GM} | 10 | W |

ELECTRICAL CHARACTERISTICS ($T_j=25^\circ\text{C}$ unless otherwise specified)

| Symbol | Test Condition | Quadrant | Value | | Unit |
|----------|--|--------------|-------|------|------------------|
| I_{GT} | $V_D = 12\text{V } R_L = 33\Omega$ | I - II - III | MAX | 50 | mA |
| V_{GT} | | I - II - III | MAX | 1.3 | V |
| V_{GD} | $V_D = V_{DRM} T_j = 125^\circ\text{C}$ $R_L = 3.3\text{K}\Omega$ | I - II - III | MIN | 0.2 | V |
| I_L | $I_G = 1.2I_{GT}$ | I - III | MAX | 80 | mA |
| | | II | | 100 | |
| I_H | $I_T = 100\text{mA}$ | | MAX | 75 | mA |
| dv/dt | $V_D = 2/3V_{DRM}$ Gate Open $T_j = 125^\circ\text{C}$ | | MIN | 1000 | V/ μs |


STATIC CHARACTERISTICS

| Symbol | Parameter | | Value(MAX) | Unit |
|-----------|---|---------------------------|------------|---------------|
| V_{TM} | $I_{TM} = 35\text{A } t_p = 380\mu\text{s}$ | $T_j = 25^\circ\text{C}$ | 1.5 | V |
| V_{TO} | Threshold voltage | $T_j = 125^\circ\text{C}$ | 0.95 | V |
| R_d | Dynamic resistance | $T_j = 125^\circ\text{C}$ | 12 | m Ω |
| I_{DRM} | $V_D = V_{DRM} V_R = V_{RRM}$ | $T_j = 25^\circ\text{C}$ | 5 | μA |
| I_{RRM} | | $T_j = 125^\circ\text{C}$ | 3 | mA |

THERMAL RESISTANCES

| Symbol | Parameter | Value | Unit |
|---------------|----------------------|-------|--------------------|
| $R_{th(j-c)}$ | junction to case(AC) | 1.7 | $^\circ\text{C/W}$ |

ORDERING INFORMATION

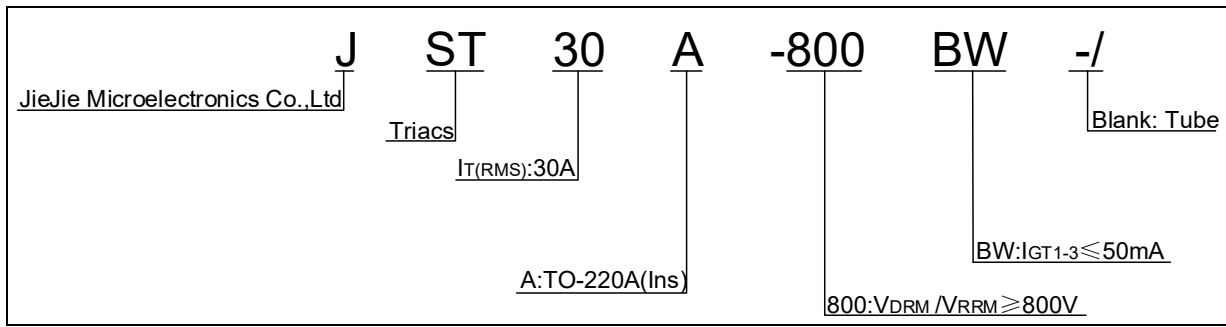

MARKING

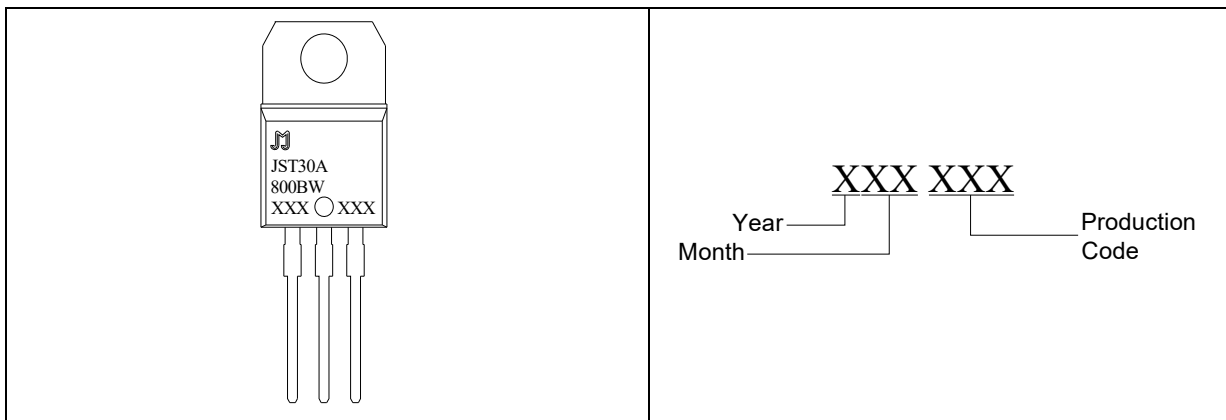


FIG.1: Maximum power dissipation versus RMS on-state current

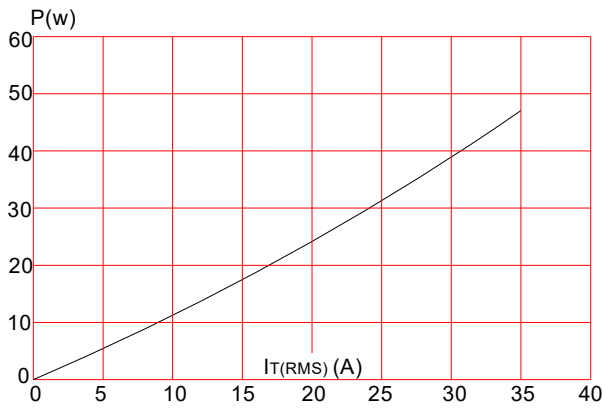


FIG.3: Surge peak on-state current versus number of cycles

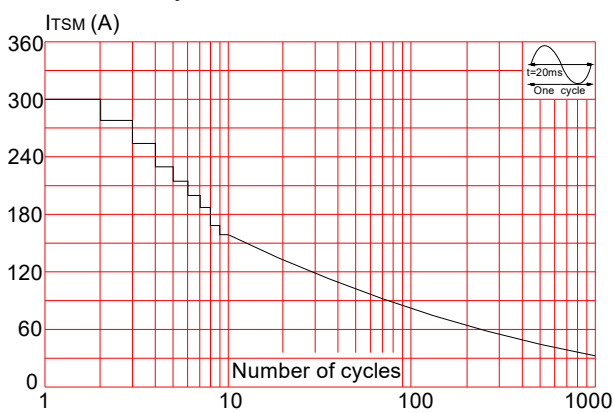


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I^2t ($di/dt < 50\text{A}/\mu\text{s}$)

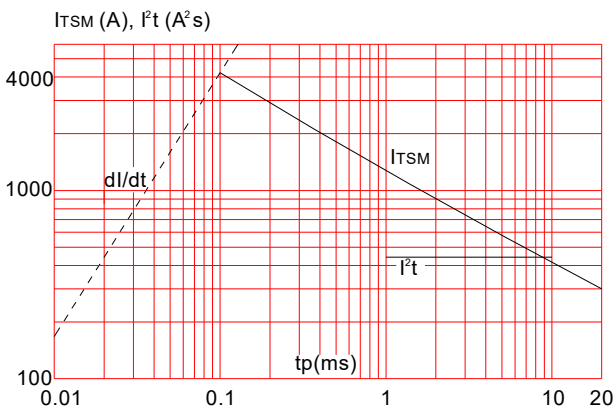


FIG.2: RMS on-state current versus case temperature

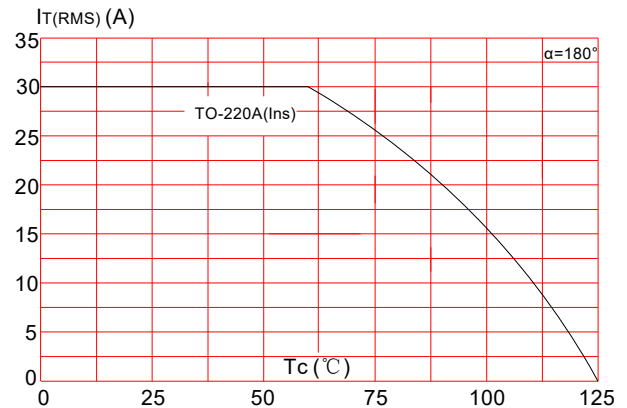


FIG.4: On-state characteristics (maximum values)


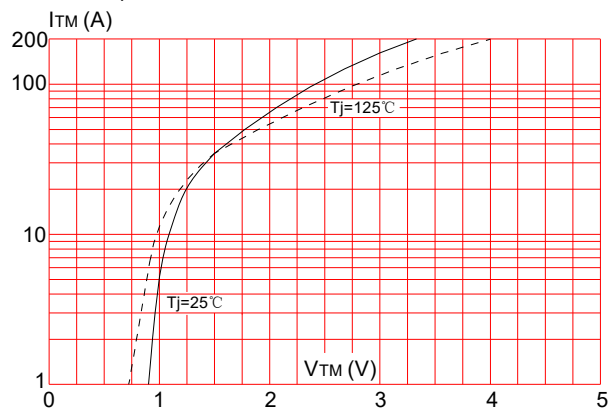


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature

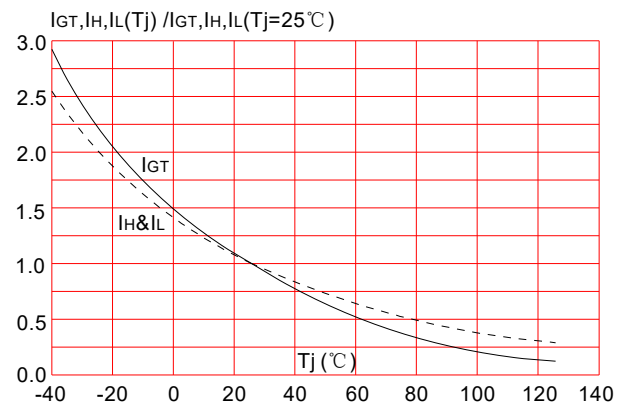


ORDERING INFORMATION

| Order code | Voltage V_{DRM}/V_{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|--------------|----------------------------------|---------|--------------|--------------------|------------------|
| JST30A-800BW | 800 | 50 | TO-220A(Ins) | 50 | Tube |

Document Revision History


| Date | Revision | Changes |
|--------------|----------|--------------|
| Mar 27, 2022 | 1 | Last updated |

PACKAGE MECHANICAL DATA

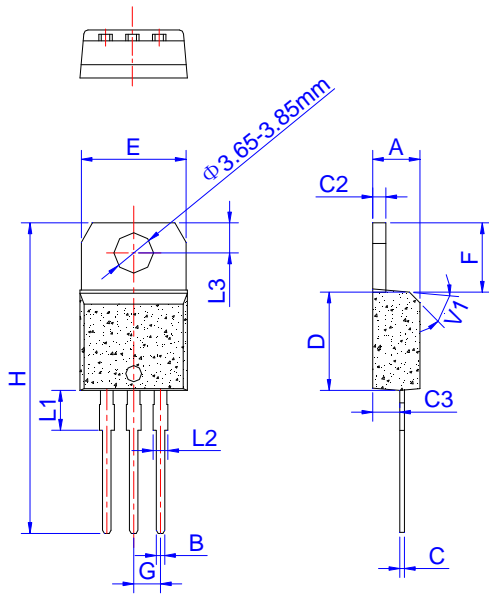

| Ref. | Dimensions | | | | | |
|------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| B | 0.61 | | 0.88 | 0.024 | | 0.035 |
| C | 0.46 | | 0.70 | 0.018 | | 0.028 |
| C2 | 1.21 | | 1.32 | 0.048 | | 0.052 |
| C3 | 2.40 | | 2.72 | 0.094 | | 0.107 |
| D | 8.60 | | 9.70 | 0.339 | | 0.382 |
| E | 9.80 | | 10.4 | 0.386 | | 0.409 |
| F | 6.55 | | 6.95 | 0.258 | | 0.274 |
| G | 2.40 | | 2.70 | 0.094 | | 0.106 |
| H | 28.0 | | 29.8 | 1.102 | | 1.173 |
| L1 | | 3.75 | | | 0.148 | |
| L2 | 1.14 | | 1.70 | 0.045 | | 0.067 |
| L3 | 2.65 | | 2.95 | 0.104 | | 0.116 |
| V1 | | 45° | | | 45° | |

DELIVERY MODE

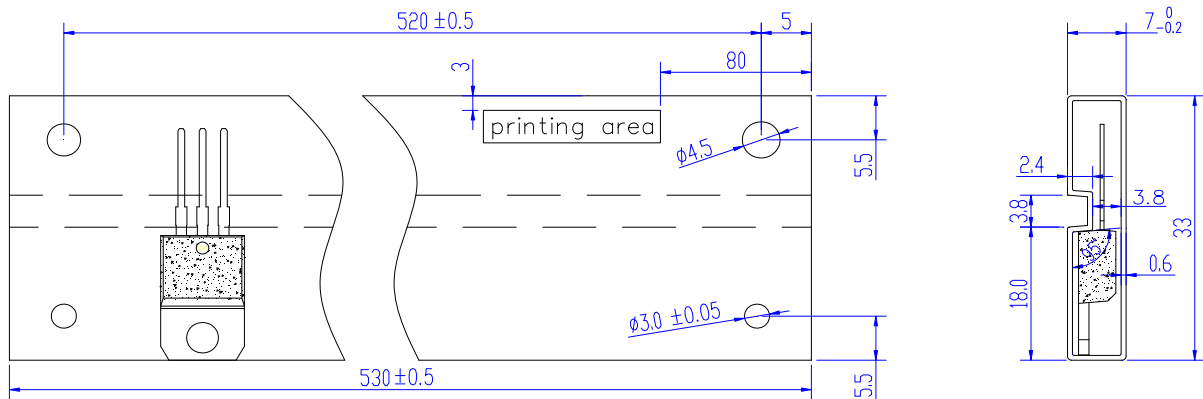

| PACKAGE | OUTLINE | TUBE (PCS) | INNER BOX (PCS) | PER CARTON |
|---------|---------|------------|-----------------|------------|
| TO-220A | TUBE | 50 | 1,000 | 5,000 |



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.
Copyright ©2022 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.