



T310H 3A TRIACs

Rev.2.0


DESCRIPTION:

T310H provide high dv/dt rate with strong resistance to electromagnetic interface. They are especially recommended for use on home appliances such as washing machines, and for use on industrial control systems like electromagnetic valves.

T310H8F provides insulation voltage rated at 2000V RMS from all three terminals to external heatsink complying with UL standards (File ref: E252906).

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	3	A
I_{GT1-3}	10	mA
V_{DRM}/V_{RRM}	800	V

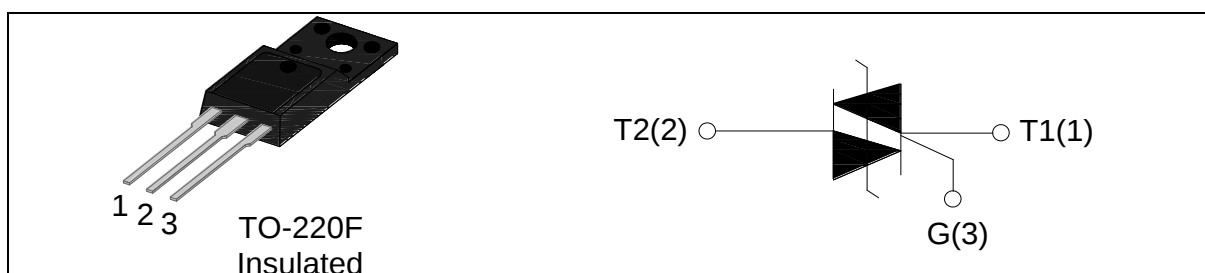

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T_{stg}	-40-150	°C
Operating junction temperature range		T_j	-40-125	°C
Repetitive peak off-state voltage($T_j=25^{\circ}C$)		V_{DRM}	800	V
Repetitive peak reverse voltage($T_j=25^{\circ}C$)		V_{RRM}	800	V
Non repetitive surge peak Off-state voltage		V_{DSM}	$V_{DRM} +100$	V
Non repetitive peak reverse voltage		V_{RSM}	$V_{RRM} +100$	V
RMS on-state current	TO-220F(Ins) ($T_C=100^{\circ}C$)	$I_{T(RMS)}$	3	A
Non repetitive surge peak on-state current (full cycle, F=50Hz)		I_{TSM}	25	A
I^2t value for fusing ($t_p=10ms$)		I^2t	3.1	A^2s
Rate of rise of on-state current ($I_G=2 \times I_{GT}$)		di/dt	50	$A/\mu s$

Peak gate current	I_{GM}	4	A
Average gate power dissipation	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	5	W

ELECTRICAL CHARACTERISTICS ($T_j=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Test Condition	Quadrant		Value	Unit
I_{GT}	$V_D=12\text{V } R_L=33\Omega$	I - II -III	MAX	10	mA
V_{GT}		I - II -III	MAX	1.3	V
V_{GD}	$V_D=V_{DRM}$ $T_j=125^{\circ}\text{C } R_L=3.3\text{K}\Omega$	I - II -III	MIN	0.2	V
I_L	$I_G=1.2I_{GT}$	I -III	MAX	20	mA
		II		40	
I_H	$I_T=100\text{mA}$		MAX	15	mA
dV/dt	$V_D=2/3V_{DRM}$ Gate Open $T_j=125^{\circ}\text{C}$		MIN	200	V/ μs

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX)	Unit
V_{TM}	$I_{TM}=4.5\text{A } t_p=380\mu\text{s}$	$T_j=25^{\circ}\text{C}$	1.5	V
I_{DRM}	$V_D=V_{DRM } V_R=V_{RRM}$	$T_j=25^{\circ}\text{C}$	5	μA
I_{RRM}		$T_j=125^{\circ}\text{C}$	1	mA


THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-c)}$	junction to case(AC)	TO-220F(Ins)	7.5	$^{\circ}\text{C/W}$

ORDERING INFORMATION

T Triacs	3 $I_{T(RMS)}:3\text{A}$	10 $I_{GT1-3}\leq 10\text{mA}$	H H:High temperature junction	8 $8:V_{DRM } /V_{RRM}\geq 800\text{V}$	F F:TO-220F(Ins)
--------------------	------------------------------------	--	---	---	----------------------------

PACKAGE MECHANICAL DATA

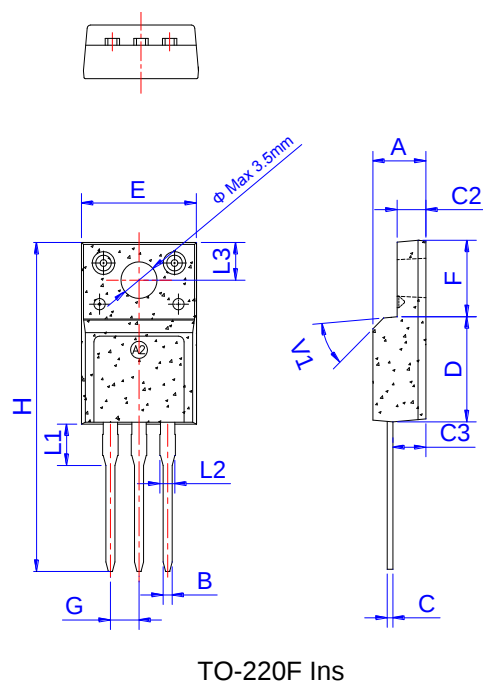

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.50		4.90	0.177		0.193
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.47		0.65	0.019		0.026
C2	2.45		2.75	0.096		0.108
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.80		10.4	0.386		0.410
F	6.40		6.80	0.252		0.268
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

FIG.1: Maximum power dissipation versus RMS on-state current

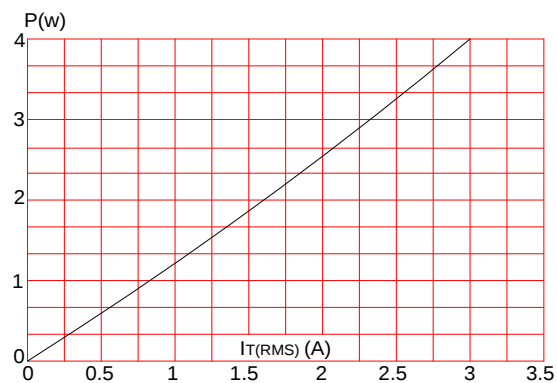


FIG.3: Surge peak on-state current versus number of cycles

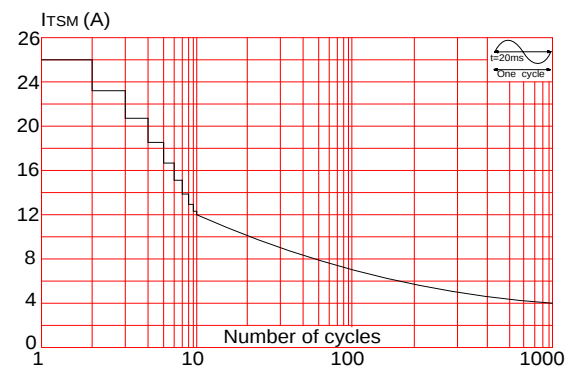


FIG.2: RMS on-state current versus case temperature

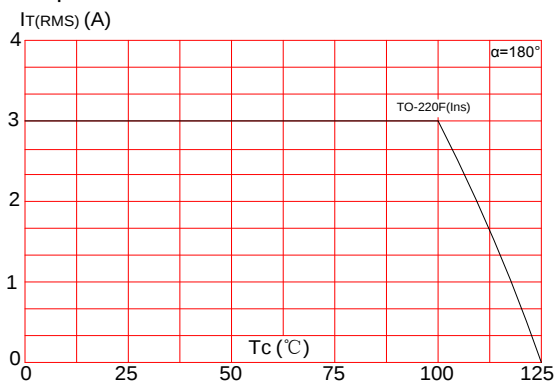


FIG.4: On-state characteristics (maximum values)

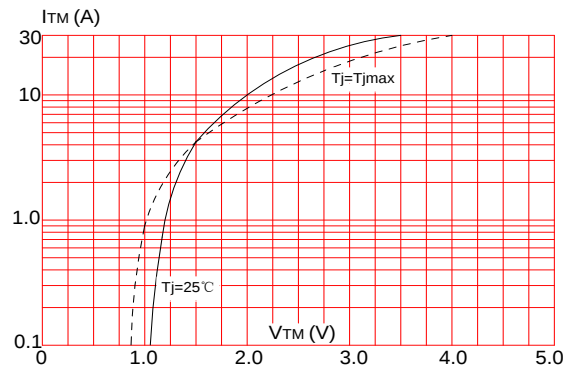


FIG.5: Relative variations of gate trigger current versus junction temperature


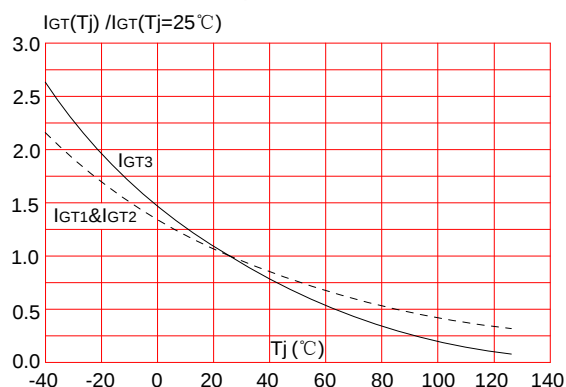


FIG.6: Relative variations of holding current, latching current versus junction temperature



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document is the second version which is made in 14-Aug.-2016. This document supersedes and replaces all information previously supplied.

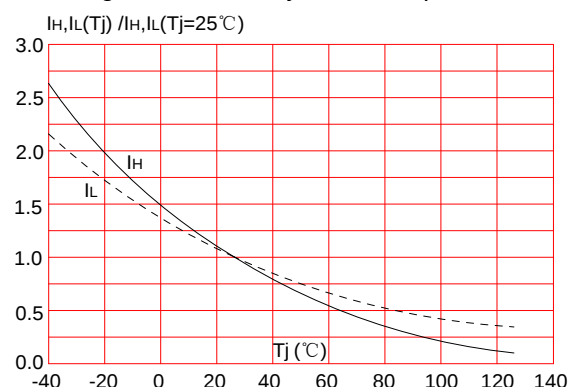

is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright ©2016 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.